

Eco/miser DISHWASHER



PROJECT NAME:

LOCATION:

ITEM #:

Qty:

MODEL #

SR-04-T

FEATURES OF PROGRAMMABLE CONTROLLER

- ⊙ Maximizes washing efficiency and provides a clean environment
- ⊙ Minimum required wash and rinse temperatures
- ⊙ Built-in electric heater (pre-heating 80 minutes) with 2 powerful rinse pumps
- ⊙ Constant pressure and temperature
- ⊙ Pumped liquid detergent and rinse agent
- ⊙ Automatic pumped drain

STANDARD FEATURES

- ⊙ Raises incoming water 59°F → 180°F hot water sanitizing
- ⊙ Variable time cycles (25~210 seconds)
- ⊙ Maximum rack capacity of 55 racks per hour at 140°F incoming water
- ⊙ Maximum rack capacity of 40 racks per hour at 59°F incoming water
- ⊙ Automatic water fill, automatic start/stop
- ⊙ 3 factory preset options (40/36/30 racks per hour, 90/100/120 seconds per cycle): 70 seconds powerful wash, 10 seconds dwell time, 10 second hot water rinse.
- ⊙ Stainless steel non-clogging wash and rinse impeller
- ⊙ Easy change hanging remote control panel
- ⊙ 304L stainless steel for corrosion resistance
- ⊙ Either straight-through or corner applications
- ⊙ Easily removable, large capacity, one-piece strainer
- ⊙ Solid state, integrated LED display controls with status indicators
- ⊙ Low-noise and large output 1 HP washing pump
- ⊙ Door coupled by stainless steel, spring counterbalanced handle. S.S. bearing guided for ease of operation and long life
- ⊙ Unique design rotating high pressure rinse impellers, both upper and lower, rinse nozzles are easily removable and interchangeable for cleaning and inspection
- ⊙ Factory installed vacuum breaker
- ⊙ Door actuated start
- ⊙ Service diagnostics
- ⊙ Listed on US Patent

OPTIONS Included

15A (1/2") water inlet hose / 5feet (1.5 m)
 Drain outlet hose / 4 feet (1.2m)

Pin Rack

QTY

2

Common Rack

1




Specifications subjected to change without notice.

APPROVALS: ETL

Legend


Height	Door open	95.1"(2,415mm)
	Door close	68.1"(1,730mm)
Electric	A	23.7"(603mm)
	a	8.2"(209mm)
Water	B	26.9"(682mm)
	b	6.6"(169mm)
Drain	C	4.0"(101mm)
	c	4.7"(120mm)

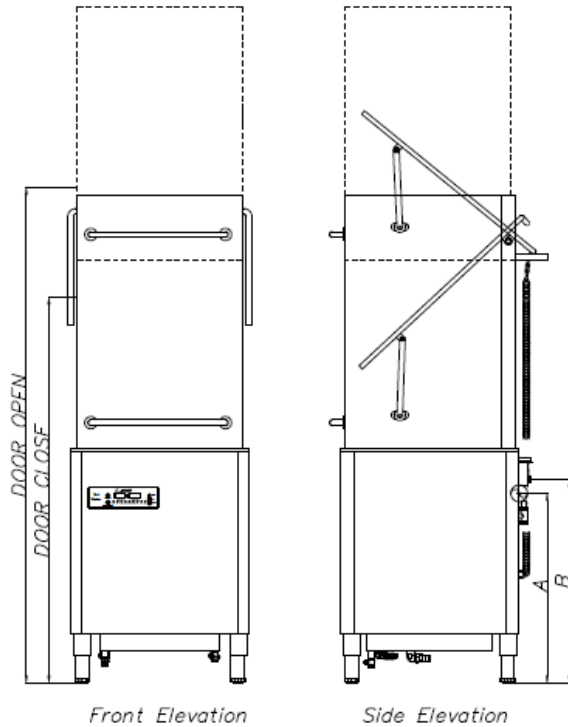




ⓐ - Electrical supply connection
SR-04T (208-230 VOLT / 220V/3Ph/17.7 amp)
(Comes with 6ft(1.8m) cord for direct connection)

W - Hot water connection
(10psi~40psi(0.7kg/cm2~2.8kg/cm2))
(Optimum water pressure/ 15psi(1.0kg/cm2))
(Spray water hardness 5 Grains)
(Connect to 3/4" male screw)

ⓓ - Drain hose connection
(MAX HEIGHT 18"(457mm))

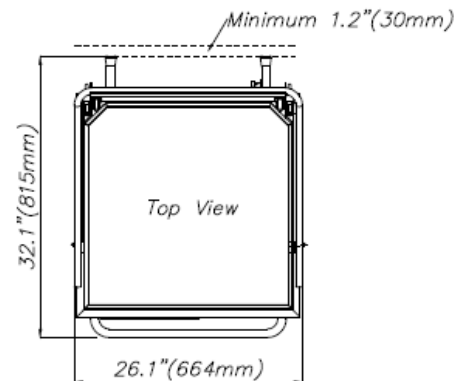

CORNER INSTALLATION / Refer to ①, ②, ③, ④

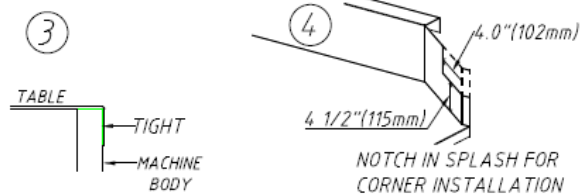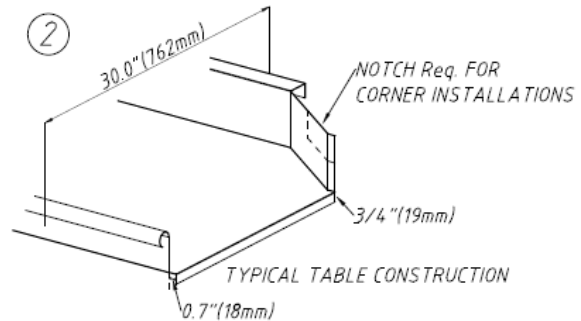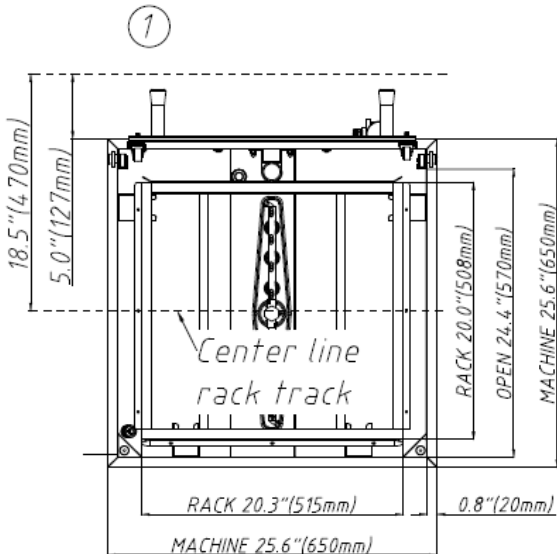

Model	Capacity (Rack/H)	Cycle (sec)	Weight (lbs.)	W	D	H	Amp	Volts	Kw	Hz	PH	1 Cycle Water Consumption
SR-04-T	40	90	286	26.1	32.1	68.1	17.7	220	6.8	60	3	1.0gal(3.8L)