



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

**MODEL: IRR-AGN302 / IRR-AGN603
IRR-AGN604**

**REACH-IN:
Slimline Reach-in Refrigerators**



General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability for the adjustment of temperatures ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Lighting.** LED lighting in cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.



Review:00 Date: 11/30/2023 IRR-AGN302_603_604

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO-North America Corporate División

1409NW 84th Avenue, Doral FL 33126
(305) 777 9599 ext.700 / f (305) 777 9598
Toll Free 855-340-4637

www.infrico.us
sales@infrico.com
service@infrico.com



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

**MODEL: IRR-AGN302 / IRR-AGN603
IRR-AGN604**

**REACH-IN:
Slimline Reach-in Refrigerators**

STANDARD FEATURES

➤ Exterior

- AISI 304 Stainless Steel.

➤ Interior

- AISI 304 Stainless Steel.
- Sealed interior floors and rounded cabinet corners.
- LED lighting.
- Internal drain trap for easy cleaning.

➤ Doors

- Polyurethane insulated door.
- Self-closing door with stay open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap in door gaskets for easy removal and cleaning.
- Field reversible door (hardware needed).
- Full-height door opening: 23"x53" (375 x 1500 mm).

➤ Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation.
- Low GWP & Zero ODP effect.

➤ Shelving

- (3) Plastic-coated wire shelves single door with Stainless Steel tray slides included.
- Tray slides are compatible with 12-51/64"x 20-55/64" (325x530 mm) sheet pans.
- Dimensions WxD: 12-51/64"x 20-55/64" (325x530 mm).

➤ Casters

- 4" diameter casters,
- Locks provided on front set.

➤ Refrigeration

- Digital temperature controller with automatic defrost system.
- Hinged control panel, easily removable.
- Energy-saving non-electric condensate pan.
- Evaporator coil coated with anti-corrosion material 100% Polyester.
- Refrigeration capacity:
IRR-AGN302: 1510 Btu/h (14°F) / 443 W (-10°C)
IRR-AGN603: 2117 Btu/h (14°F) / 621 W (-10°C).
IRR-AGN604: 2117 Btu/h (14°F) / 621 W (-10°C).

➤ Electrical

- Cord and NEMA 5-15P plug,
- Electrical connection is 115 V / 1ph / 60 Hz.



OPTIONAL FEATURES

- ✓ Stainless steel wire shelf.
- ✓ Additional slide kits.
- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Electrical connection is 230V / 1ph / 50 Hz (plug type varies).

MODELS	Dimensions (inches) (mm)			Doors	Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temperature Range (°F) (°C)	Cond. Unit (H.P) H.P.	Capacity (Cu.Ft.)	Case Amps 115V	Net weight (Lbs.) (Kg.)
	W	D	H									
IRR-AGN302	19 (482)	27-7/8 (709)	82-1/16 (2085)	2	3	R290	0,22 (100)	28,4°F/46,4 °F (-2°C/+8°C)	1/3	11,47 (325)	3,60	265 (120)
IRR-AGN603	38-3/8 (974)	27-7/8 (709)	82-1/16 (2085)	3	6	R290	0,24 (110)	28,4°F/46,4 °F (-2°C/+8°C)	3/8	26,31 (745)	4,85	265 (120)
IRR-AGN604	38-3/8 (974)	27-7/8 (709)	82-1/16 (2085)	4	6	R290	0,24 (110)	28,4°F/46,4 °F (-2°C/+8°C)	3/8	26,31 (745)	4,85	265 (120)

Review:00 Date: 11/30/2023 IRR-AGN302_603_604

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO – North America Corporate Division
1409NW 84th Avenue, Doral FL 33126
(305) 777 9599 ext.700 / f (305) 777 9598 / Toll
Free 855-340-4637

www.infrico.us
sales@infrico.com
service@infrico.com



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____


MODEL: IRR-AGN302 / IRR-AGN603
IRR-AGN604

REACH-IN:
Slimline Reach-in Refrigerators

ELEVATION

RIGHT VIEW

PLAN VIEW

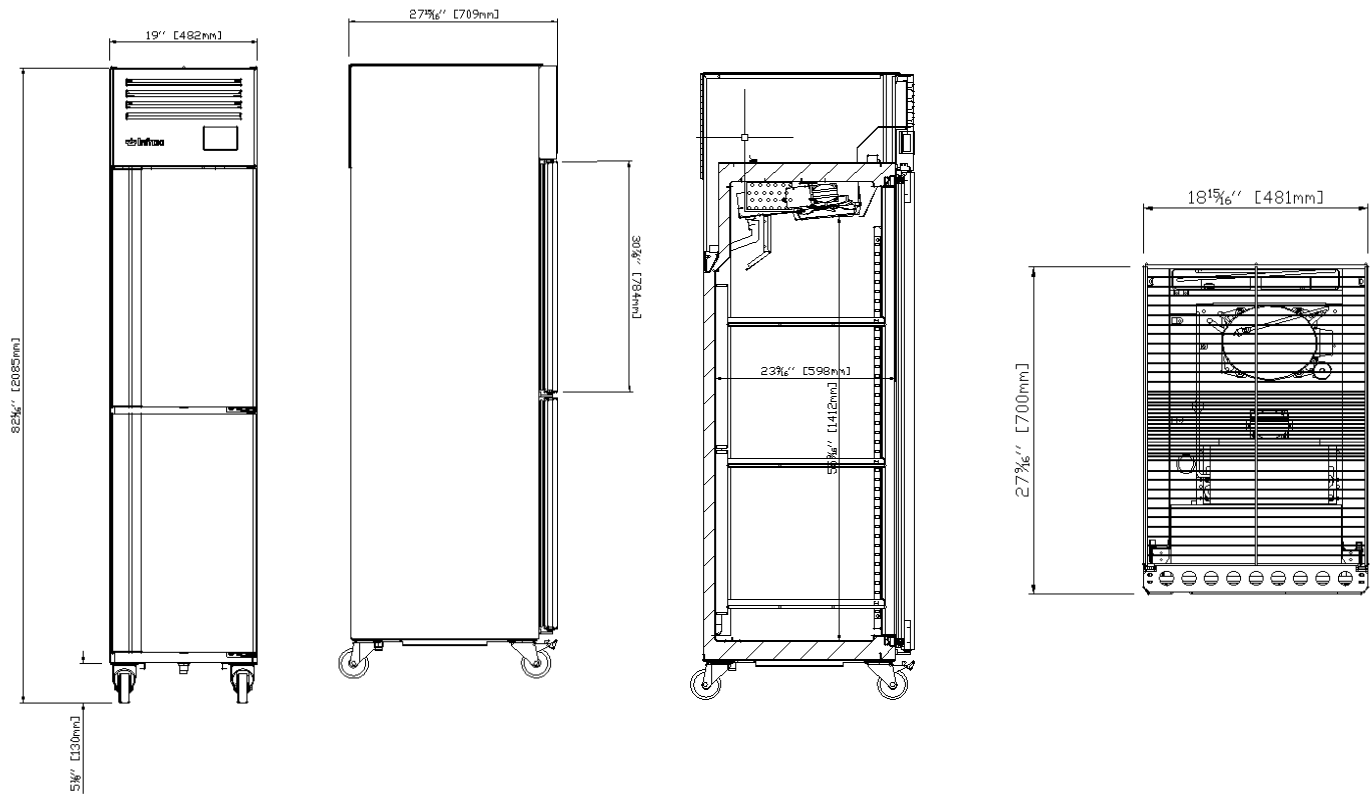

IRR-AGN302

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO – North America Corporate Division
1409NW 84th Avenue, Doral FL 33126
(305) 777 9599 ext.700 / f (305) 777 9598 / Toll
Free 855-340-4637

www.infrico.us
sales@infrico.com
service@infrico.com




Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

MODEL: IRR-AGN302 / IRR-AGN603
IRR-AGN604


REACH-IN:
Slimline Reach-in Refrigerators

ELEVATION

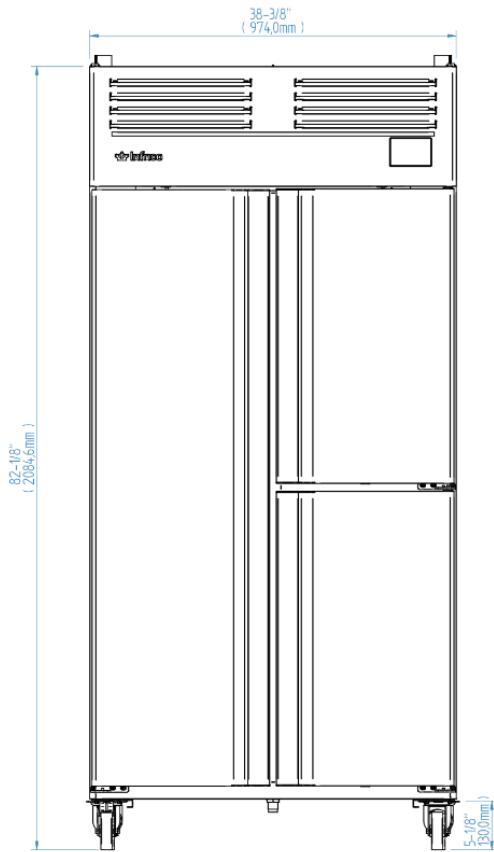


IRR-AGN603

RIGHT VIEW

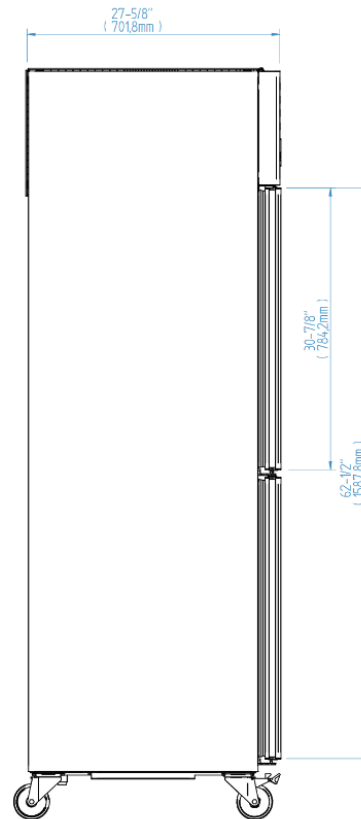

PLAN VIEW

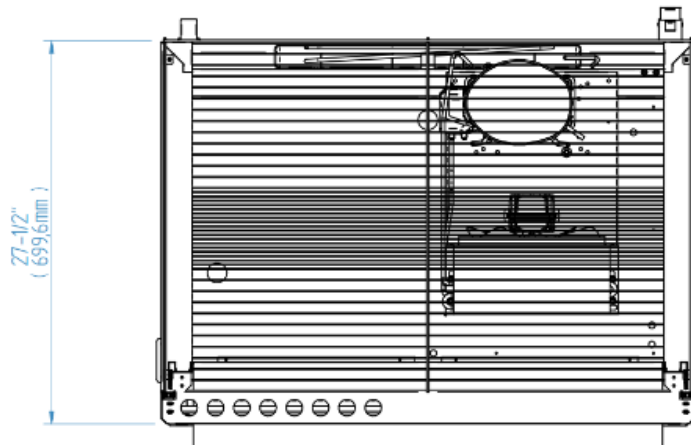

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO – North America Corporate Division
1409NW 84th Avenue, Doral FL 33126
(305) 777 9599 ext.700 / f (305) 777 9598 / Toll
Free 855-340-4637

www.infrico.us
sales@infrico.com
service@infrico.com




Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____


MODEL: IRR-AGN302 / IRR-AGN603
IRR-AGN604

REACH-IN:
Slimline Reach-in Refrigerators

ELEVATION

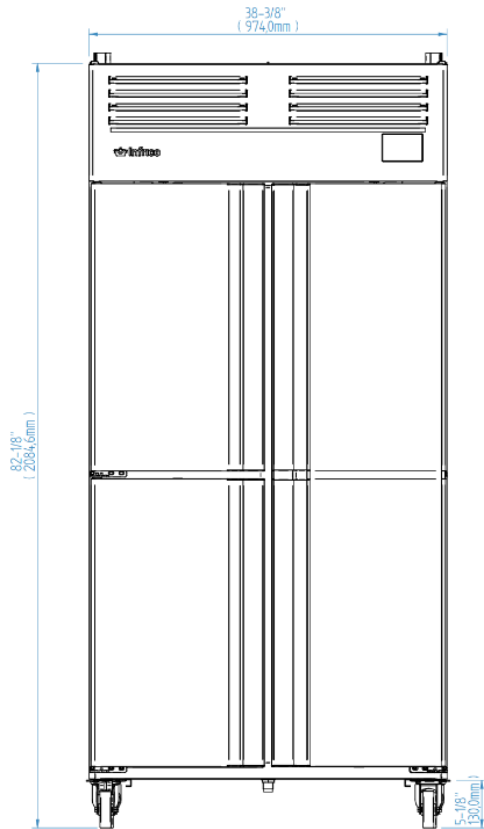


RIGHT VIEW

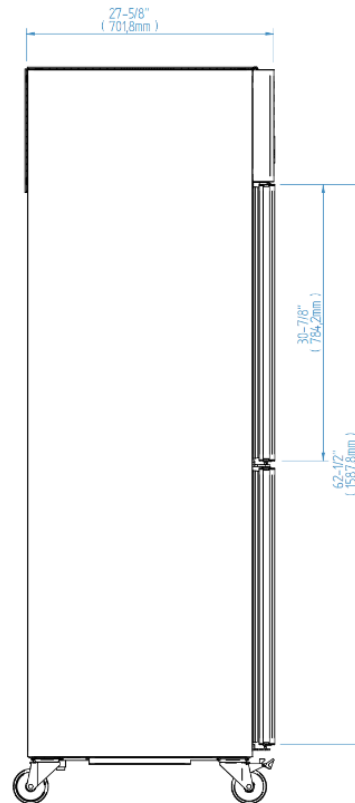

RR-AGN604

PLAN VIEW

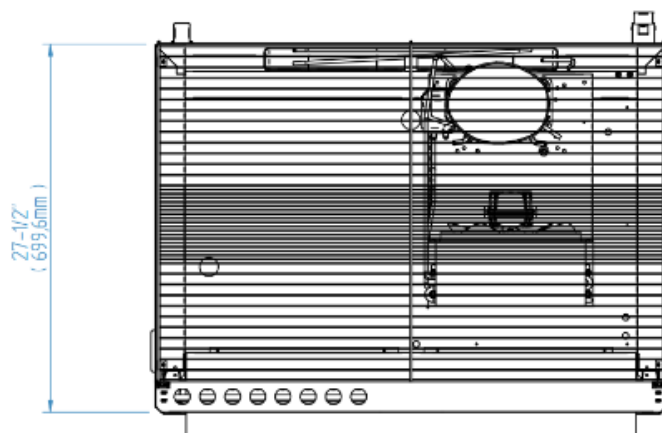

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO – North America Corporate Division
1409NW 84th Avenue, Doral FL 33126
(305) 777 9599 ext.700 / f (305) 777 9598 / Toll
Free 855-340-4637

www.infrico.us
sales@infrico.com
service@infrico.com