

MODEL: IUC-MSG36 / IUC-MSG48
 IUC-MSG52 / IUC-MSG52-60/ IUC-MR72
 IUC-MSG96 / IUC-MSG110

CHEF BASES

GENERAL FEATURES

- ✓ **Higher energy efficiency.** R290 refrigerant with electric fans and evaporative tray without electric resistances.
- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Drawers.** All drawers include triple chamber door gaskets, easy to remove and snap in. Heavy-duty stainless-steel slides hold up to 440 lbs. Integrated handle and self-closing system.
- ✓ **Control System.** Greater ability for the adjustment of temperature range as per the end user's requirements.
- ✓ **100% Tested.** All condensing units undergo rigorous testing in helium chambers for refrigerant leak detection and a final equipment test in a state-of-the-art test room.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.



Review:01 Date: 11/16/2023 IRT-MR_EN

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODEL: IUC-MSG36 / IUC-MSG48
IUC-MSG52 / IUC-MSG52-60/ IUC-MR72
IUC-MSG96 / IUC-MSG110

CHEF BASES

STANDARD FEATURES

➤ Exterior

- AISI 304 Stainless Steel Top.
- Front and sides in AISI 430 Stainless Steel.

➤ Interior

- AISI 304 Stainless Steel.
- Sealed interior floors.

➤ Drawers

- Each drawer accommodates one full 12"x20" pans and three of 1/6 pans (pans not included).
- Drawers with full-extension sliding rails for complete opening.
- Drawers with integrated handle.
- Accommodate up to 6" deep pan depths.
- Heavy-duty stainless-steel drawer slides designed to hold up to 440 Lbs (200 Kg).

➤ Insulation

- CFC- Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation.
- Low GWP & Zero ODP effect.

➤ Casters

- 4" Diameter casters already installed.
- Locks provided on front set.

OPTIONAL FEATURES

- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Electrical connection is 230 V / 1 ph / 50 Hz (Plug type and consumption varies).

➤ Pans

- IUC- MSG36: 2- 12x20 / 6-1/6 pans.
- IUC-MSG48: 4 pans.
- IUC-MSG52: 6 pans.
- IUC-MSG72: 8 pans.
- IUC-MSG96: 12 pans.
- IUC-MSG110: 12 pans (12X20").

➤ Refrigeration

- Protected digital temperature controller with automatic defrost system.
- Energy-saving non-electric condensate pan.
- Forced air refrigeration system.
- Extractable coil coated with anti-corrosion material 100% polyester.
- **Refrigeration capacity:**
 IUC- MSG36 - 1535 Btu/h(14°F)/ 450 W(-10°C).
 IUC-MSG48 - 1535 Btu/h(14°F)/ 450 W(-10°C).
 IUC-MSG52 – 1535 Btu/h (-22°F) / 450 W(-10°C).
 IUC-MSG52-60 – 1535 Btu/h (-22°F) / 450 W(-10°C).
 IUC-MSG72–1535 Btu/h (-22°F) / 450 W(-10°C).
 IUC-MSG96– 2047 Btu/h (-22°F) / 600 W(-10°C).
 IUC-MSG110– 2047 Btu/h (-22°F) / 600 W(-10°C).

➤ Electrical

- Cord and NEMA 5-P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 15 AMP breakers required.



➤ ETL Listed to UL471 Standard and Sanitation classified to NSF7.

MODEL: IUC-MSG36 / IUC-MSG48
 IUC-MSG52 / IUC-MSG52-60/ IUC-MR72 IUC-MSG96 / IUC-MSG110

CHEF BASES




	Dimensions (inches) (mm)			Drawers	Ref.	Ref.Weight (Lbs.) (gr.)	Temperature Range (°F) (°C)	Cond. Unit (H.P)	Capacity (Cu.Ft.) (L)	Case Amps 115V	Net weight (Lbs.) (Kg.)
	W	D	H								
IUC-MSG36	36-5/8 (930)	32-1/2 (825)	25-25/32 (655)	2	R290	0.22 (100)	33°F / 38°F (0°C / +6°C)	1/4	5,12 (145)	4,44	275 (125)
IUC-MSG48	48-5/8 (1235)	32-1/2 (825)	25-25/32 (655)	2	R290	0.22 (100)	33°F / 38°F (0°C / +6°C)	1/4	6,81 (193)	4,44	330 (150)
IUC-MSG52	53-1/4 (1352)	32-1/2 (825)	25-25/32 (655)	2	R290	0.265 (120)	33°F / 38°F (0°C / +6°C)	1/4	9,88 (280)	4,44	390 (177)
IUC-MSG52-60	60 (1524)	32-1/2 (825)	25-25/32 (655)	2	R290	0.265 (120)	33°F / 38°F (0°C / +6°C)	1/4	9,88 (280)	4,44	390 (177)
IUC-MSG72	72-5/8 (1845)	32-1/2 (825)	25-25/32 (655)	4	R290	0.265 (120)	33°F / 38°F (0°C / +6°C)	1/4	14,3 (405)	4,70	507 (230)
IUC-MSG96	97 (2464)	32-1/2 (825)	25-25/32 (655)	4	R290	0.265 (120)	33°F / 38°F (0°C / +6°C)	1/3	20,6 (584)	5,88	623 (283)
IUC-MSG110	110-5/8 (2810)	32-1/2 (825)	25-25/32 (655)	6	R290	0.265 (120)	33°F / 38°F (0°C / +6°C)	1/3	32 (620)	5,88	683 (310)

PLAN VIEW

ELEVATION

PLANT VIEW

RIGHT VIEW

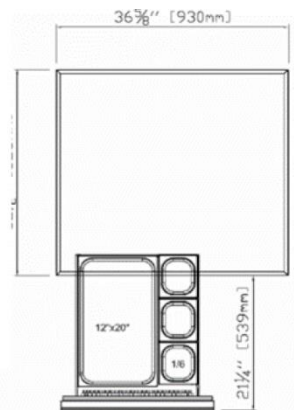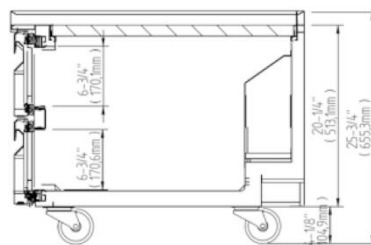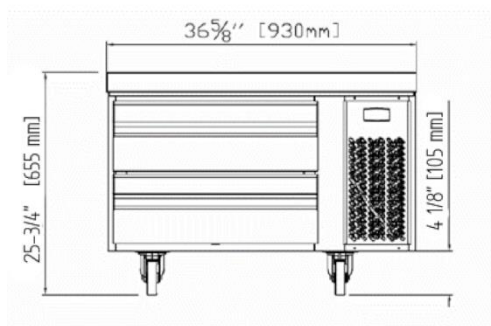

IUC-MSG36

Review:01 Date: 11/16/2023 IRT-MR_EN
 ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE




INFRICO-North America Corporate División
 1409NW 84th Avenue, Doral FL 33126
 (305) 777 9599 ext. 700 / f (305) 777 9598
 Toll Free 855-340-4637

www.infrico.us
sales@infrico.com


MODEL: IUC-MSG36 / IUC-MSG48
 IUC-MSG52 / IUC-MSG52-60/ IUC-MR72 IUC-MSG96 / IUC-MSG110

CHEF BASES


ELEVATION

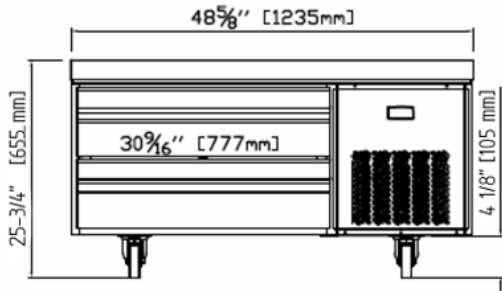

PLANT VIEW

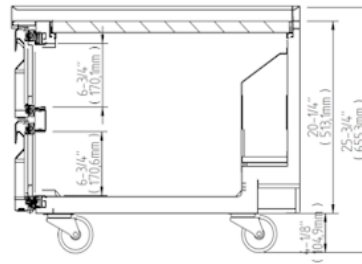


RIGHT VIEW

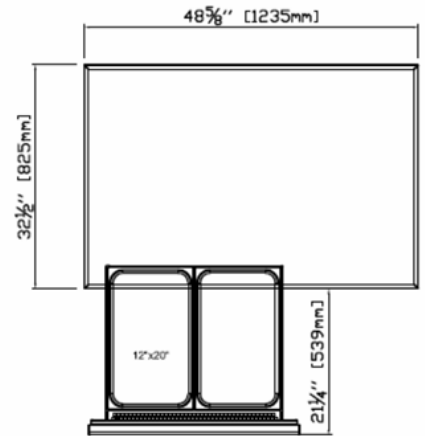


IUC-MSG48


ELEVATION

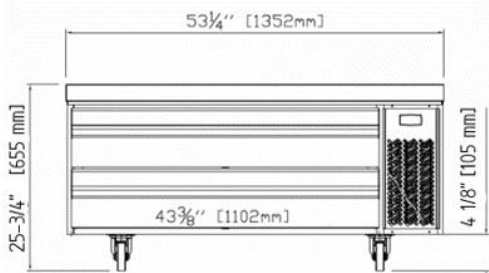


PLANT VIEW




RIGHT VIEW

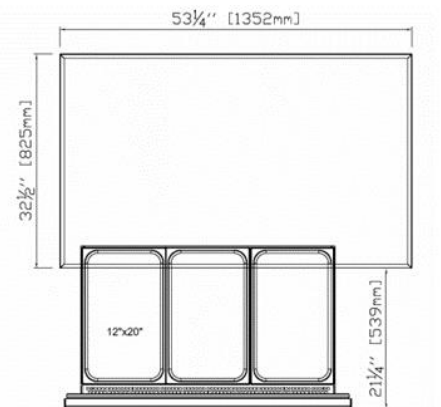


ELEVATION

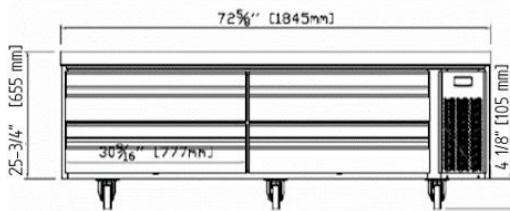

PLANT VIEW



RIGHT VIEW

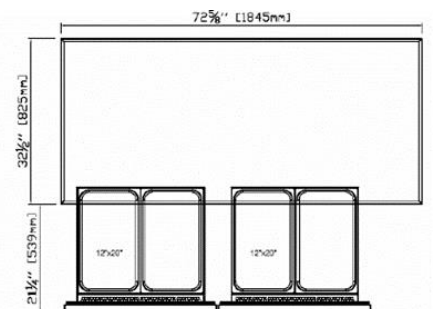

IUC-MSG72

Review:01 Date: 11/16/2023 IRT-MR_EN

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE




MODEL: IUC-MSG36 / IUC-MSG48
 IUC-MSG52 / IUC-MSG52-60/ IUC-MR72 IUC-MSG96 / IUC-MSG110

CHEF BASES

ELEVATION

PLANT VIEW



RIGHT VIEW

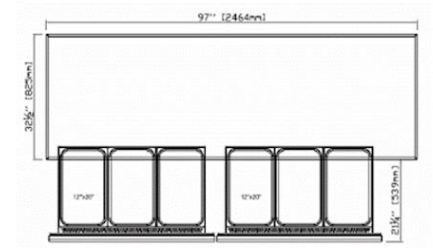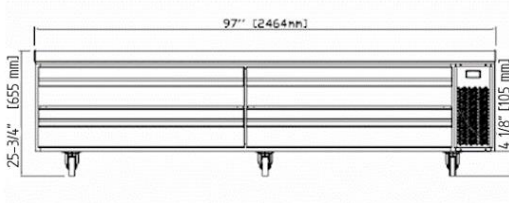


IUC-MSG96

ELEVATION

PLANT VIEW

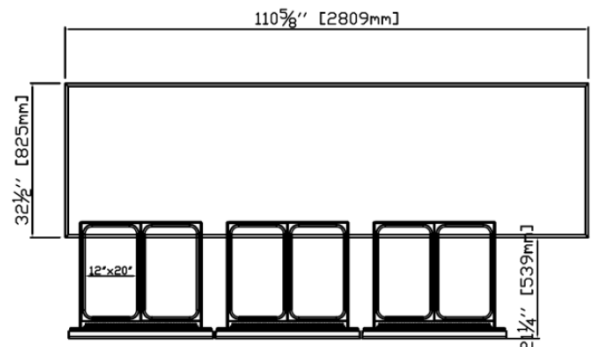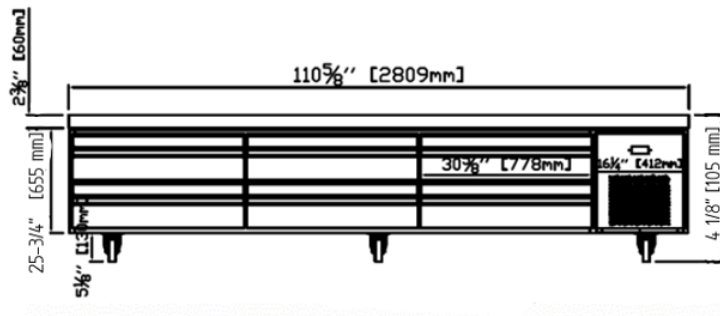

RIGHT VIEW

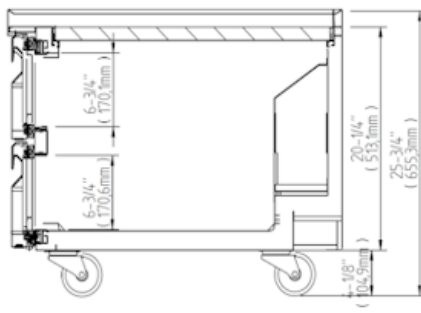

IRT-MR119EN

Review:01 Date: 11/16/2023 IRT-MR_EN

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE