

MODEL: IUC-MR41_67_93
IUC-MR41BT_67BT

DEEP UNDERCOUNTER:
Undercounter Refrigerators.



GENERAL FEATURES

- ✓ **Higher energy efficiency.** R290 refrigerant with electric fans and evaporative tray without electric resistances.
- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remain open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and shap in.
- ✓ **Control System.** Greater ability for the adjustment of temperature range as per the end user's requirements.
- ✓ **100% Tested.** All condensing units undergo rigorous testing in helium chambers for refrigerant leak detection and a final equipment test in a state-of-the-art test room.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.



Review:01 Date: 11/16/2023 IUC-MR

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODEL: IUC-MR41_67_93
IUC-MR41BT_67BT

DEEP UNDERCOUNTER:
Undercounter Refrigerators.

STANDARD FEATURES

➤ Exterior

- AISI 304 Stainless Steel Top.
- AISI 430 Stainless Steel.
- 4" Backsplash – Worktop.

➤ Interior

- AISI 304 Stainless Steel.
- Internal drain plugs for easy cleaning.
- Sealed interior floors and rounded cabinet corners.

➤ Door

- Polyurethane insulated door.
- Self-closing door with stay open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap in door gaskets for easy removal and cleaning.
- Field reversible door.
- Door locks.
- Full-height door opening: 22-7/8" x 20-5/8" (580x 523 mm).

➤ Insulation

- CFC- Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation.
- Low GWP & Zero ODP effect.

➤ Casters

- Diameter casters already installed 7-7/8.
- Locks provided on front set.

OPTIONAL FEATURES

- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Electrical connection is 230 V / 1 ph / 50 Hz (Plug type and consumption varies).
- ✓ Stainless Steel wire shelves.
- ✓ Additional slide kits.
- ✓ Single Overshelf.
- ✓ Double Overshelf.

➤ Shelving

- (2) Plastic coated wire shelves per section.
- Set of Stainless- Steel shelf brackets.
- Easy remove for cleaning.
- Dimensions WxD: 20-7/8" x 25-5/8" (GN2/1) (530x650 mm).
- Compatible with 18"x26" (457x660 mm) sheet pans.

➤ Refrigeration

- Digital temperature controller with automatic defrost system.
- Energy-saving non-electric condensate pan.
- Forced air refrigeration system.
- Extractable condensing unit for easy service.
- Extractable coil coated with anti-corrosion material 100% polyester.
- **Refrigeration capacity:**
 IUC-MR41 - 1510 Btu/h(14°F)/ 443 W(-10°C).
 IUC-MR67 - 2117 Btu/h(14°F)/ 621 W(-10°C).
 IUC-MR93 - 2117 Btu/h (14°F) / 621 W(-10°C).
 IUC-MR41BT - 1046 Btu/h(-22°F)/ 307 W(-30°C).
 IUC-MR67BT - 2714 Btu/h(-22°F)/ 796 W(-30°C).

➤ Electrical

- Cord and NEMA 5-P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 15 AMP breakers required.



➤ ETL Listed to UL471 Standard and Sanitation classified to NSF

MODEL: IUC-MR41_67_93
IUC-MR41BT_67BT

DEEP UNDERCOUNTER:
Undercounter Refrigerators.


	Dimensions (inches) (mm)			Doors	Shelves	Ref.	Ref.Weight (Lbs.) (gr.)	Temperature Range (°F) (°C)	Cond. Unit (H.P)	Capacity (Cu.Ft.) (L)	Case Amps 115V	Net weight (Lbs.) (Kg.)
	W	D	H									
IUC-MR41	41-1/4 (1049)	32-5/8 (829)	39-3/4 (1009)	1	2	R290	0,22 (100)	33°F / 38°F (+0°C / +4°C)	1/4	7.8 (220)	3,47	370 (168)
IUC-MR67	67-1/4 (1708)	32-5/8 (829)	39-3/4 (1009)	2	4	R290	0,26 (120)	33°F / 38°F (+0°C / +4°C)	1/3	17 (480)	4,76	580 (263)
IUC-MR93	93-1/4 (2368)	32-5/8 (829)	39-3/4 (1009)	3	6	R290	0,26 (120)	33°F / 38°F (+0°C / +4°C)	1/3	27 (765)	4,76	690 (313)
IUC-MR41BT	41-1/4 (1049)	32-5/8 (829)	39-3/4 (1009)	1	2	R290	0,24 (110)	0 °F (-18°C)	1/2	7.8 (220)	3,07	392 (178)
IUC-MR67BT	67-1/4 (1708)	32-5/8 (829)	39-3/4 (1009)	2	4	R290	0,28 (130)	0 °F (-18°C)	3/4	17 (480)	7,52	601 (273)

PLAN VIEW

ELEVATION

PLANT VIEW

RIGHT VIEW

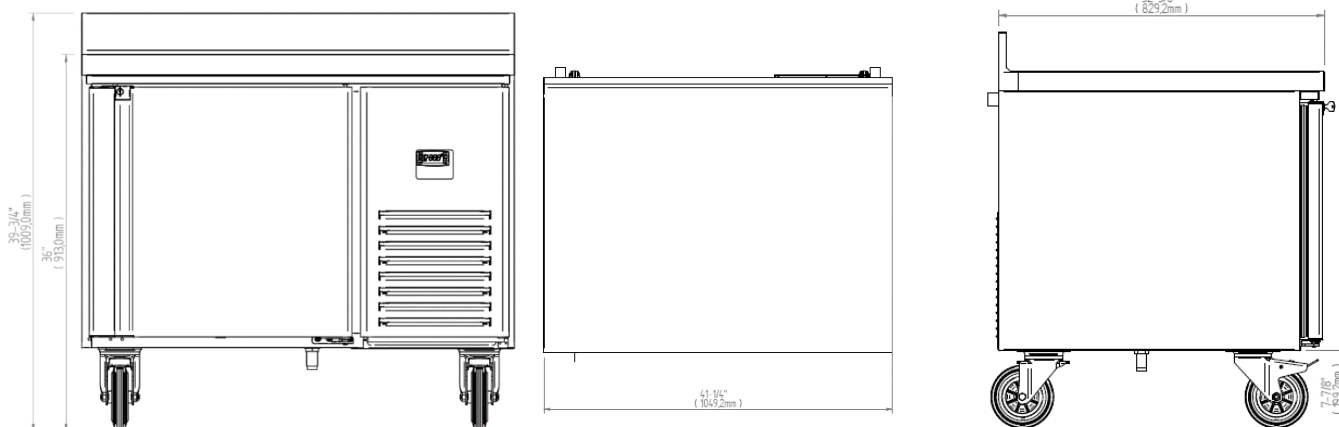


IUC-MR41


MODEL: IUC-MR41_67_93
IUC-MR41BT_67BT

DEEP UNDERCOUNTER:
Undercounter Refrigerators.


ELEVATION

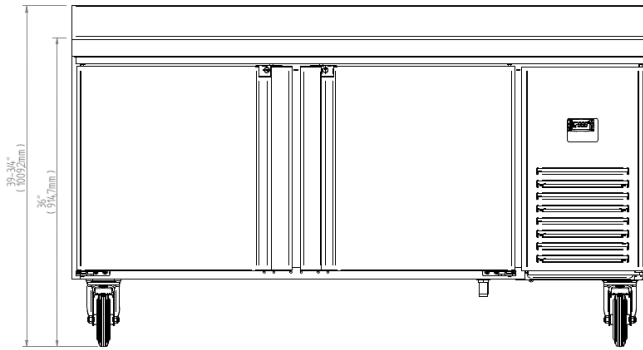

PLANT VIEW

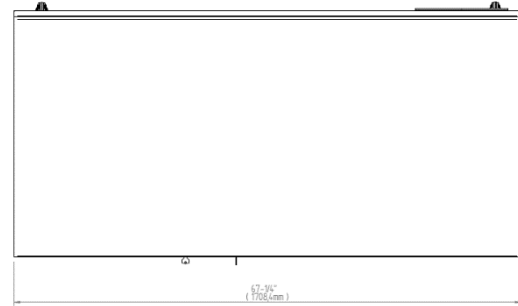


RIGHT VIEW

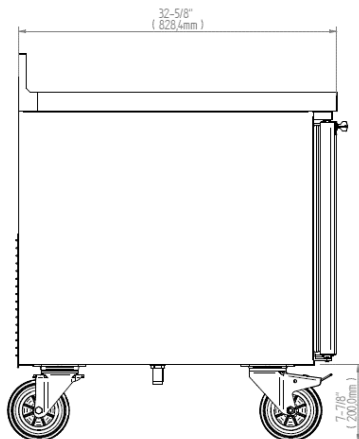


IUC-MR67

ELEVATION

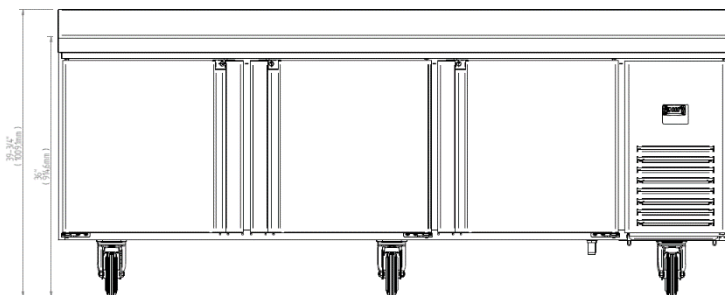


PLANT VIEW

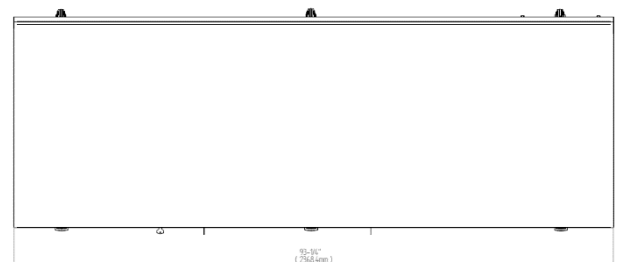

MODEL: **IUC-MR41_67_93**
IUC-MR41BT_67BT

DEEP UNDERCOUNTER:
Undercounter Refrigerators.

RIGHT VIEW

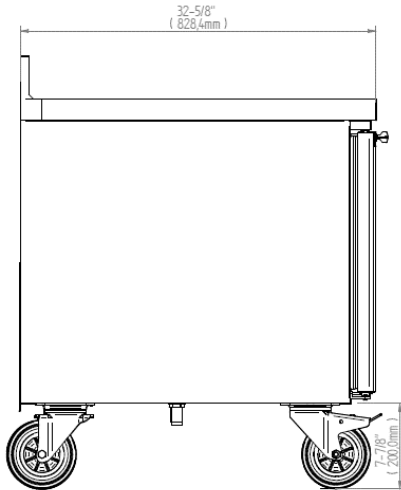

IUC-MR93EN