




Model:

VBR SS CURVED DELI-
PASTRY

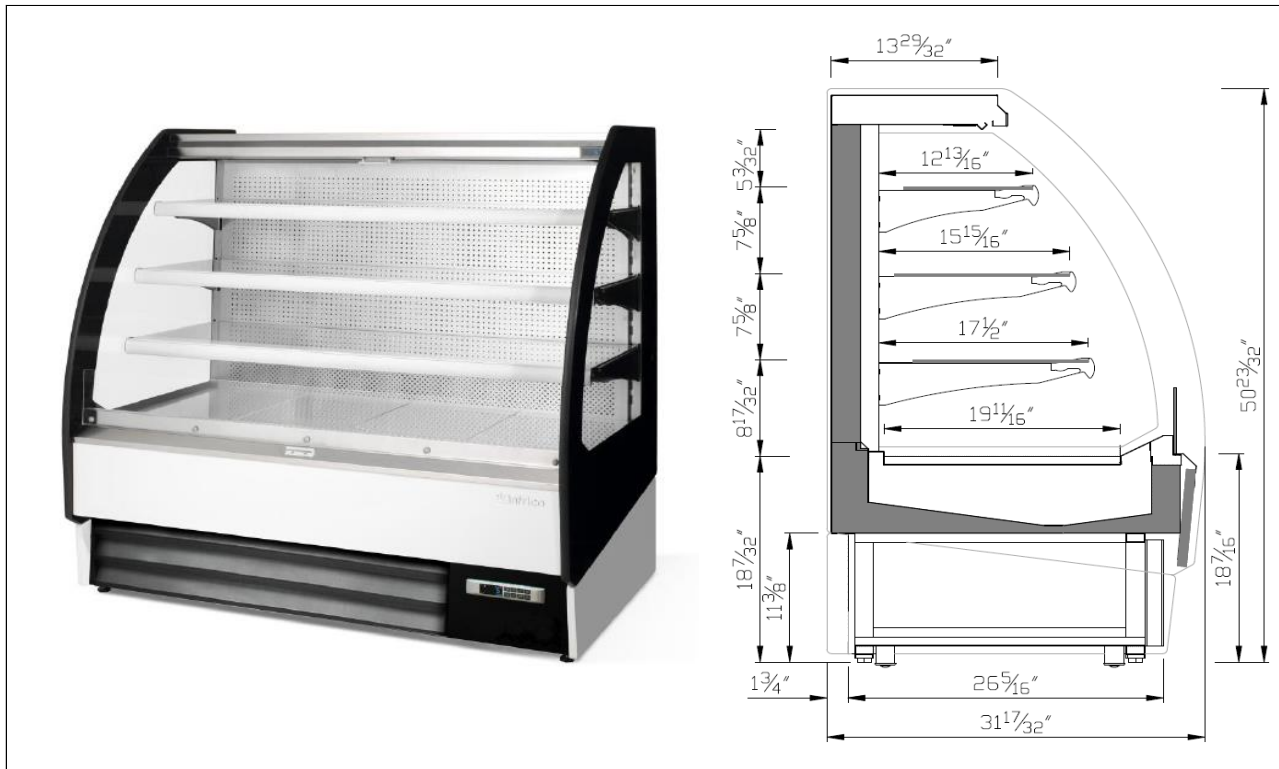

ESTANDAR FEATURES



EXTERIOR

- ⊗ AISI 304 Stainless Steel.
- ⊗ Glass sided panels.
- ⊗ Heavy duty ball transfer and levelling feet.
- ⊗ Enamelled steel base.
- ⊗ Modulaire line.
- ⊗ Doors with double glass without serigraphy that provide low heat transmission.



INTERIOR

- ⊗ AISI 304 Stainless Steel.
- ⊗ Stainless Steel internal panel perforated.
- ⊗ Inclination and height adjustable shelves.
- ⊗ Front and shelves 40 mm price ticket rail.
- ⊗ LED lighting in canopy and under each shelf.



INSULATION

- ⊗ CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- ⊗ Low GWP & Zero ODP effect.



ELECTRICAL AND ELECTRONIC CONTROLLERS

- ⊗ Remote alarm signals.
- ⊗ NTC temperature probes encapsulated and sealed.
- ⊗ Effective way to visualize temperature
- ⊗ Cord and NEMA 5-20P plug. Electrical connections is 115V/ 1ph/ 60 Hz (digital control).



REGRIGERATION

- ⊗ Digital temperature controller with automatic defrost system.
- ⊗ Ventilated condensation system.
- ⊗ Constant circulation of air for prevent the acumulation of heat in the housing of the unit.

GENERAL DATA


	MODEL		
	VBR9ISS	VBR12ISS	VBR18ISS
LENGTH (in)	37	49 1/5	73 5/6
SIDE PANEL THICKNESS (in)	1 1/6		
TOTAL VOLUME (Ft ³) VBR_IR	9 1/4	12 1/3	18 1/2
TDA - AREA TOTAL DISPLAY (Ft ²)	9 1/2	12 5/8	19
UNIT WEIGHT (lb)	397	428	467
CREATED DIMENSIONS (in)	37 4/5 x 57 x 42 1/2	37 4/5 x 57 x 55 1/8	37 4/5 x 57 x 79 5/7

INSTALLATION DETAILS

DATA TABLE

MODEL	VBR9ISS	VBR12ISS	VBR18ISS	0	0
A (in)	5 5/7	5 5/7	5 5/7		
B (in)	19 1/7	19 1/7	19 1/7		
C (in)	8 2/3	8 2/3	8 2/3		

FOOT | WHEELS POSITION

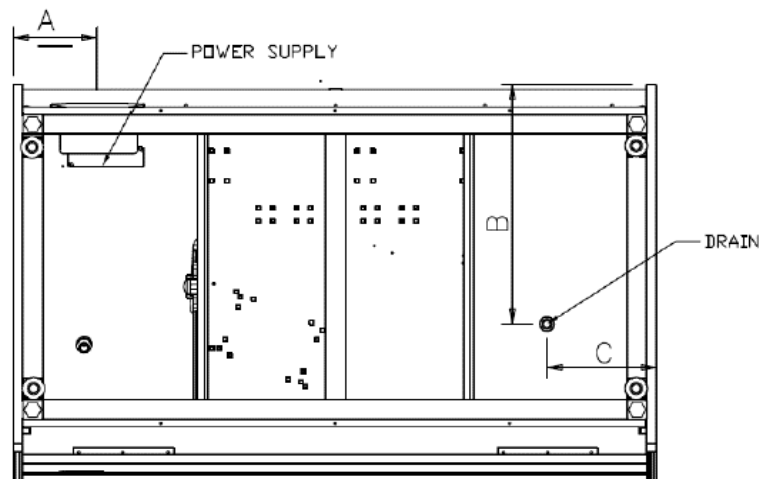

TECHNICAL CONFIGURATION

		MEDIUM TEMPERATURE [30°F/45°F]
INTERIOR TEMPERATURE	SET POINT	35°F
	DIFFERENTIAL	3
DEFROST TYPE		NATURAL
N° DEFROSTS / 24h		4
END OF DEFROSTING TEMPERATURE		46°F
MAXIMUM DEFROSTING TIME		15'

In compliance with UL471 and NSF7

Ambient Temp.	Humidity
+75 °F	55 %

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION TRAY	-

VOLTAGE	115V/60Hz
SOUND LEVEL	≤70 dB

INSTALLATION DATA

BASE EQUIPMENT		MODEL			
		VBR9ISS	VBR12ISS	VBR18ISS	
COMPRESSOR	N°	1	1	1	
	V/Hz	115/60	115/60	115/60	
	Btu/h	5033	5033	6651	
	W	784	784	1092	
	hp	1	1	1/2	
	A	3,84	3,84	5,72	
REFRIGERANT	Type	R290			
	lb	0,20	0,26	0,42	
COIL FANS	N°	2	3	4	
	V/Hz	115/60	115/60	115/60	
	W	4,8	4,8	4,8	
	A	0,04	0,04	0,04	
CONDENSATOR FANS	N°	2	2	3	
	V/Hz	115/60	115/60	115/60	
	W	11,0	11,0	11,0	
	A	0,43	0,43	0,43	
LIGHTING LED	W	22	30	45	
	A	0,19	0,26	0,39	
TOTAL	115 V	A	5,0	5,1	7,5
		W	838	850	1189
TOTAL CONSUMPTION	kWh/24h	13,1	13,3	18,6	
MCA/MOP	MCA	5,96	6,01	8,94	
	MOP	9,57	9,61	14,31	

OPTIONAL EQUIPMENT		MODEL		
Length (mm)		VBR9ISS	VBR12ISS	VBR18ISS
SHELVES LIGHTING	W	9	12	18
	A	0,04	0,05	0,08
EVAPORATION HEATERS	W	450	450	450
	A	2	2	2