

KOOL-IT

Signature

LX-10RB

SINGLE GLASS DOOR MERCHANDISER REFRIGERATOR

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.



DOE

NOM



NEMA 5-15P

Signature **40/80 Warranty**
40 months parts and labor
80 months on compressor (part only)

KEY FEATURES



• Eco-Friendly Refrigerant

Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA, California & Canada refrigerant & energy standards.



• Intelligent Electronic Control

Patented ETC1H electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



• High Power Reliable Refrigeration System

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



• Standard LED Lighting System

Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.



• Newly Designed Condenser

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



• Spark-Free Refrigeration Components

All Reach-In models have spark free refrigeration components for optimal safety, per UL requirements.



3560 NW 56th Street
Fort Lauderdale, FL, United States 33309
Telephone: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100


5659 Royalmount Ave.
Montreal, QC, Canada H4P 2P9
Telephone: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com / mvpgroupcorp.com



LX-10RB

SINGLE GLASS DOOR MERCHANDISER REFRIGERATOR

PRODUCT VIEWS

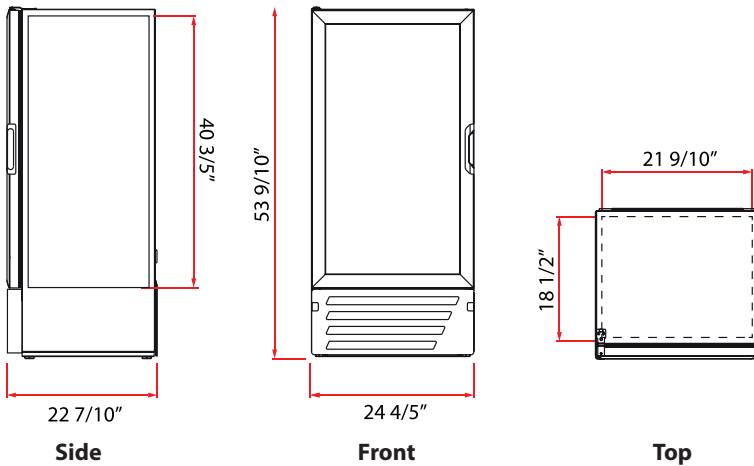

TECHNICAL SPECIFICATIONS

Exterior Dimensions		Interior Dimensions	
W:	24 4/5" (63 cm)	W:	21 9/10" (56 cm)
D:	22 7/10" (58 cm)	D:	18 1/2" (47 cm)
H:	53 9/10" (137 cm)	H:	40 3/5" (103 cm)
Usable Interior Capacity		Usable Volume	
W:	20 3/10" (52 cm)	9.43 Cu Ft 267 L	
D:	16 7/10" (43 cm)		
H:	35 1/5" (89 cm)		
Doors	Material	Shelves	Shelf Size
1	V7 Plastic Frame	3	W: 20 9/10" (53 cm) D: 17 3/10" (44 cm)
Exterior Material		Pre-painted steel	
Interior Material		Pre-painted steel	

ADDITIONAL FEATURES



Manual Lock - External lock available



Gravity kit - Visi-Slide product display technology



Price Kit - Available for shelf display



Casters or legs are available options

REFRIGERATION PERFORMANCE

Refrigerant	Energy Consumption
R290a / 1.7 oz (0.047 kg)	1.250 kWh/24h
Compressor Power	Condenser
1/10 HP	Finless (low maintenance)
Thermostat default setting	32°F (0°C) to 44.6°F (7°C)

ELECTRICAL

Power Supply	Amps	Lighting
115V/60Hz	3.2A	315 Lux Output 5 modules, 8 LED per
Plug Type	Controller	Cord Length
NEMA 5-15P	ETC1H	118" (300 cm)

LOGISTICS

Trailer Loads	Unit Weight	Shipping Dimensions	
53': 80	171.1 lb (77.6 kg)	W:	26 2/5" (67 cm)
	Shipping Weight	D:	23 2/5" (60 cm)
	176.1 lb (79.9 kg)	H:	57 9/10" (147 cm)