

PROJECT NAME:	
LOCATION:	
ITEM:	QTY:
MODEL:	



# SRHP-2-12 | SRHP-4-24 | SRHP-6-36 SRHP-8-48 | SRHP-10-60 GAS HOT PLATE SRHP SERIES

Sierra series gas hot plate was developed to provide the best cooking experience, combining high standard of quality, performance and durability to satisfy all professional kitchens demands.



# **STANDARD FEATURES**

- Available in 12" (305 mm), 24" (610 mm), 36" (915 mm), 48" (1,220 mm) and 60" (1,525 mm) width.
- Stainless steel front and sides.
- 12" x 12" cast iron top grates designed for easy movement of pots across top sections.
- Solution State State
- Orange paint injected aluminum knobs providing for better toughness and durability.
- § 4" adjustable chromed carbon steel legs.
- Search State St
- Units are shipped ready for natural gas (NG). A propane gas (LP) conversion kit and NG/LP regulator is supplied with the unit.

# ACCESSORIES/OPTIONAL

- Pressure regulator
- Series Propane gas (LP)/natural gas (NG) conversion kits.



3560 NW 56th Street Fort Lauderdale, FL 33309 Tel.: 786.600.4687 / Toll Free: 844.218.8477 Fax.: 786.661.4100



5659 Royalmount Avenue Montreal, Qc, Canada H4P 2P9 Tel.: 514.737.9701 / Toll Free: 888.275.4538 Fax.: 514.342.3854 / Toll Free: 877.453.8832

SRHP05172022

# sales@mvpgroupcorp.com

**GRIDDLE GREASE TRAP CAPACITY** 


	MODEL						
COLLECTING TRAY CAPACITY	SRHP-2-12	SRHP-4-24	SRHP-6-36	SRHP-8-48	SRHP-10-60		
	0.61 gal (2.3 L)	2.20 gal (8.4 L)	3.81 gal (14.4 L)	6.07 gal (23 L)	7.62 gal (28.8 L)		

\* Note: The SRHP-10-60 model has two grease trays with capacity of 3.81 gal (14.4L) in its structure.



# **TECHNICAL DRAWINGS**

### GAS HOT PLATES SRHP SERIES SRHP-2-12 | SRHP-4-24 | SRHP-6-36| SRHP-8-48 | SRHP-10-60

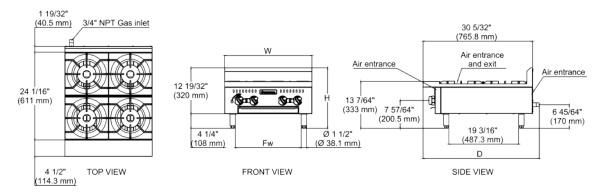

### **SPECIFICATIONS**

	Exterior Product Dimensions & Weight				Shipping Crate Dimensions & Weight				
Models	Width (W)	Depth (D)	Height (H)	Fw	Weight	Width	Depth	Height	Weight
SRHP-2-12	12"	32"	16 27/32"	9 5/64"	70 lb	16 9/64"	34 1/4"	18 1/2"	93 lb
	(305 mm)	(812.8 mm)	(428 mm)	(230.5 mm)	(32 kg)	(410 mm)	(870 mm)	(490 mm)	(42 kg)
SRHP-4-24	24"	32"	16 27/32"	18 3/32"	121 lb	28 1/16"	34 1/4"	18 1/2"	154 lb
	(610 mm)	(812.8 mm)	(428 mm)	(459.5 mm)	(55 kg)	(715 mm)	(870 mm)	(470 mm)	(70 kg)
SRHP-6-36	36"	32"	16 27/32"	31 9/32"	174 lb	40 1/32"	34 1/4"	18 1/2"	218 lb
	(915 mm)	(812.8 mm)	(428 mm)	(794.5 mm)	(79 kg)	(1020 mm)	(870 mm)	(470 mm)	(99 kg)
SRHP-8-48	48"	32"	16 27/32"	43 9/32"	238 lb	52 31/32"	34 1/4"	18 1/2"	298 lb
	(1220 mm)	(812.8 mm)	(428 mm)	(1099.5 mm)	(108 kg)	(1320 mm)	(870 mm)	(470 mm)	(135 kg)
SRHP-10-60	60"	32"	16 27/32"	55 19/64"	300 lb	64 1/16"	34 1/4"	18 1/2"	352 lb
	(1525 mm)	(812.8 mm)	(428 mm)	(1404.5 mm)	(136 kg)	(1630 mm)	(870 mm)	(470 mm)	(160 kg)

## UTILITY INFORMATION

GAS SUPPLY							
Models	Burners	Propane Natural		Manifold Pressure			
		BTU/h	BTU/h	Natural Gas	Propane Gas		
SRHP-2-12	2	50,000	50,000		10" W.C		
SRHP-4-24	4	100,000	100,000				
SRHP-6-36	6	150,000	150,000	4" W.C			
SRHP-8-48	8	200,000	200,000				
SRHP-10-60	10	250,000	250,000				

§ 25,000 BTU/h burners, providing best performance.

Manifold pressure is 4" W.C (natural gas) or 10" W.C (propane gas).

3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.

Scheck the altitude specifications above 2,000 ft.

\* NOTE: In line with its policy to continually improve its product, Sierra reserves the right to change materials and specifications without notice.

# INSTALLATION INSTRUCTIONS

A pressure regulator sized for this unit is included. The gas line connecting to the range must be 3/4" or larger. If flexible connectors are used, the inside diameter must be 3/4" or larger. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.4. These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code.

Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.

Warranty: 12 months parts & labor. See Sierra Price List for full details.

Gas Connection: 3/4" NPT on the right hand rear of the appliance. The pressure regulator (supplied) is to be connected here by the installer.

Gas pressure: 4"W.C. - Natural Gas | 10"W.C. - Propane.

Combustible Clearances: For use in non-combustible locations | Non-combustible Clearances: 0 inches sides, 0 inches rear Specify type of gas and altitude, if over 2,000 feet, when ordering. SIERRA is a registered trademark of MVP Group.

Due to continuing product development, to ensure best possible performance, the specifications are subject to change without prior notice.



3560 NW 56th Street Fort Lauderdale, FL 33309 Tel.: 786.600.4687 / Toll Free: 844.218.8477 Fax.: 786.661.4100



5659 Royalmount Avenue Montreal, Qc, Canada H4P 2P9 Tel.: 514.737.9701 / Toll Free: 888.275.4538 Fax.: 514.342.3854 / Toll Free: 877.453.8832

### sales@mvpgroupcorp.com

www.mvpgroupcorp.com