



### C0530 - 500lb Cube Ice Machine

Prodigy Plus® Modular Cube Ice Machine

#### The world's smartest cuber.

As the world's only self-monitoring cuber, the new Scotsman Prodigy Plus® cube ice machines make it easier than ever to maintain your equipment and save money. Whether it's the advanced ice level control or an optional feature board for quick diagnostics, this is ice-making re-imagined. And with intuitive technology like AutoAlert™ indicator lights, a reduced operational footprint and easy-access service from the front panel, Prodigy Plus® cubers are simply the smartest, most reliable way to create fresh-tasting ice — every time.

### The Prodigy Plus® difference.

- AutoAlert™ indicator lights for better visibility
- Operational footprint among the industry's smallest
- Industry-exclusive QR code instantly connects users to service information and warranty history
- One-touch cleaning reduces labor costs and saves time
- Front-located air filter for more efficient operation
- Self-aligning front panel for easy access to key components
- Patented WaterSense purge control automatically reduces scale buildup
- Patented Harvest Assist efficiently moves cube ice to the bin
- Smart-Board™ advanced feature module available for additional diagnostic capabilities
- Optional Vari-Smart™ ice level control allows operators to customize ice levels
- Antimicrobial protection guards internal surfaces between cleanings
- A full range of water- and energy-saving features



### 24 Hour Volume Production

| Air Cooled             |              |                        |                        | Remote       |                        |                        | Water Cooled |                        |  |
|------------------------|--------------|------------------------|------------------------|--------------|------------------------|------------------------|--------------|------------------------|--|
| 70°F/21°C<br>50°F/10°C | Air<br>Water | 90°F/32°C<br>70°F/21°C | 70°F/21°C<br>50°F/10°C | Air<br>Water | 90°F/32°C<br>70°F/21°C | 70°F/21°C<br>50°F/10°C | Air<br>Water | 90°F/32°C<br>70°F/21°C |  |
| 525/238<br>lb/kg       |              | 380/172<br>lb/kg       | 500/227<br>lb/kg       |              | 400/181<br>lb/kg       | 500/227<br>lb/kg       |              | 410/186<br>lb/kg       |  |



R330P





B530P

# **Modular Bin Options**

| Model<br>Number* | Dimensions<br>W" x D" x H" | Bin Application<br>Capacity<br>Ib/kg | Finish           | Ship Weight<br>lb/kg |  |
|------------------|----------------------------|--------------------------------------|------------------|----------------------|--|
| B330P            | 30 x 34 x 30**             | 344/156                              | Poly             | 130/59               |  |
| B530S or P       | 30 x 34 x 44**             | 536/244                              | Metallic or Poly | 150/68               |  |

<sup>\*</sup> Contact Scotsman for bin top requirements. \*\* Add 6" Height for bin legs.








- 3 years parts and labor on all components.
- 5 years parts and labor on the evaporator.
- 5 years parts on the compressor and condenser.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor



• 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •

## C0530 - 500lb Cube Ice Machine

Prodigy Plus® Modular Cube Ice Machine

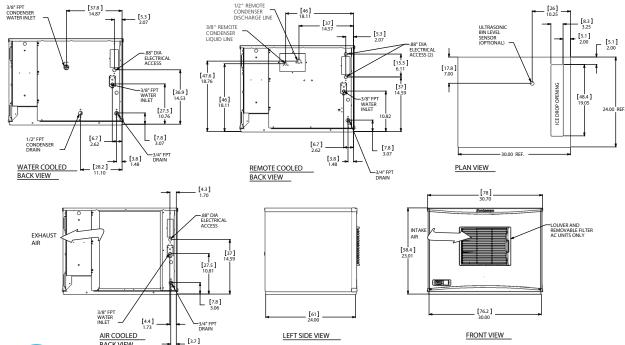



|     | Max. Fuse Size Energy Consumption |                   |                                    |                                   | Gallons/100 lb (liters/45.4 kg) |                          |                                               |           |                            |
|-----|-----------------------------------|-------------------|------------------------------------|-----------------------------------|---------------------------------|--------------------------|-----------------------------------------------|-----------|----------------------------|
|     | Model Number                      | Condenser<br>Unit | Basic Electrical<br>Volts/Hz/Phase | or HACR Circuit<br>Breaker (amps) | Circuit<br>Wires                | Min. Circuit<br>Ampacity | kWh/100 lb (45.4 kg)<br>90°F(32°C)/70°F(21°C) | Potable   | Condenser<br>:)/70°F(21°C) |
|     | C0530MA-1                         | Air               | 115/60/1                           | 20                                | 2                               | 15.2                     | 5.80                                          | 18.0/68.1 | -                          |
| J   | C0530MR-1                         | Remote            | 115/60/1                           | 20                                | 2                               | 16.2                     | 6.50                                          | 18.0/68.1 | -                          |
| ļ d | C0530MW-1                         | Water             | 115/60/1                           | 15                                | 2                               | 13.5                     | 5.00                                          | 18.0/68.1 | 160.0/606.7                |
|     | └C0530MA-32                       | Air               | 208-230/60/1                       | 15                                | 2                               | 7.8                      | 5.80                                          | 18.0/68.1 | -                          |
|     | C0530SA-1                         | Air               | 115/60/1                           | 20                                | 2                               | 15.2                     | 5.80                                          | 18.0/68.1 | -                          |
| ST  | C0530SR-1                         | Remote            | 115/60/1                           | 20                                | 2                               | 16.2                     | 6.50                                          | 18.0/68.1 | -                          |
| =   | C0530SW-1                         | Water             | 115/60/1                           | 15                                | 2                               | 13.5                     | 5.00                                          | 18.0/68.1 | 160.0/606.7                |
| l.  | C0530SA-32                        | Air               | 208-230/60/1                       | 15                                | 2                               | 7.8                      | 5.80                                          | 18.0/68.1 | -                          |



### **All Models**

| Dimensions     | /۱۸/  | v | D                  | v | Н١  |  |
|----------------|-------|---|--------------------|---|-----|--|
| Difficilisions | ( v v | ^ | $\boldsymbol{\nu}$ | ^ | 11/ |  |

30" x 24" x 23" Unit:

(76.2 x 61.0 x 58.4 cm)

33.5" x 27.5" x 28" Shipping Carton:

(85.1 x 69.9 x 71.1 cm)

Shipping Weight: BTUs per hour: 175 lb / 80 kg 7,900

Refrigerant: R-404A



### Accessories

| Model Number | Description                                                                             |
|--------------|-----------------------------------------------------------------------------------------|
| KVS          | Vari-Smart™ Ice Level Control - Program ice bin levels to match ice needs.              |
| KSBU         | Smart-Board™ Advanced Control - Use additional operational data for fast diagnosis.     |
| KSBU-N       | Smart-Board™ Advanced Control with Network - Network capable.                           |
| ERC111-1     | Remote condenser for C0530xR, 115/60/1- Consult remote condenser spec sheet for details |
| BRTE10       | 10ft (3.0 m) line set, brazing required                                                 |
| BRTE25       | 25ft (7.6 m) line set, brazing required                                                 |
| BRTE40       | 40ft (12.2 m) line set, brazing required                                                |
| BRTE75       | 75ft (22.9 m) line set, brazing required                                                |
| KPAS         | Prodigy Advanced Sustainability Kit - Includes KVS and KSBU - N                         |
| KPPSA323     | Prodigy Plus <sup>®</sup> Side Air Flow Kit for C0330, C0530 and C0630                  |

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



### **Operating Requirements**

|                    | Minimum           | Maximum           |  |
|--------------------|-------------------|-------------------|--|
| Air Temperatures   | 50°F (10°C)       | 100°F (38°C)      |  |
| Water Temperatures | 40°F (4.4°C)      | 100°F (38°C)      |  |
| Remote Cond. Temps | -20°F (-29°C)     | 120°F (49°C)      |  |
| Water Pressures    | 20 PSIG (1.4 bar) | 80 PSIG (5.5 bar) |  |
| Electrical Voltage | -5%               | +10%              |  |

Specifications and design are subject to change without notice.

1-800-SCOTSMAN Fax: 847-913-9844

© 2021 Scotsman Ice Systems.

www.scotsman-ice.com customer.relations@scotsman-ice.com



Mater Heade

an Ali Group Company

 <sup>101</sup> Corporate Woods Parkway, Vernon Hills, IL 60061