

C0830 - 800lb Cube Ice Machine

Prodigy Plus[®] Modular Cube Ice Machine

The world's smartest cuber.

As the world's only self-monitoring cuber, the new Scotsman Prodigy Plus® cube ice machines make it easier than ever to maintain your equipment and save money. Whether it's the advanced ice level control or an optional feature board for quick diagnostics, this is ice-making re-imagined. And with intuitive technology like AutoAlert™ indicator lights, a reduced operational footprint and easy-access service from the front panel, Prodigy Plus® cubers are simply the smartest, most reliable way to create fresh-tasting ice — every time.

The Prodigy Plus[®] difference.

- AutoAlert[™] indicator lights for better visibility
- Operational footprint among the industry's smallest
- · Industry-exclusive QR code instantly connects users to service information and warranty history
- One-touch cleaning reduces labor costs and saves time
- Front-located air filter for more efficient operation
- Self-aligning front panel for easy access to key components
- Patented WaterSense purge control automatically reduces scale buildup
- · Patented Harvest Assist efficiently moves cube ice to the bin
- Smart-Board[™] advanced feature module available for additional diagnostic capabilities
- Optional Vari-Smart[™] ice level control allows operators to customize ice levels
- Antimicrobial protection guards internal surfaces between cleanings
- A full range of water- and energy-saving features

24 Hour Volume Production

Modular Bin Options

Air Cooled				Remote			Water Cooled		
70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	
905/411 lb/kg		718/326 lb/kg	870/395 lb/kg		780/355 lb/kg	924/420 lb/kg		832/378 lb/kg	

Bin Application

Capacity

lb/kg

536/244

536/244

778/353



B530P



Model

Number*

B530P

B530S

B842S



B842S



Scotsman[®]



* Contact Scotsman for bin top requirements. ** Add 6" Height for bin legs

Dimensions

W" x D" x H"

30 x 34 x 44**

30 x 34 x 44**

42 x 34 x 44**



Ship Weight

lb/kg

110/50

150/68

190/86

Finish

Poly

Metallic

Metallic


- 3 years parts and labor on all components.
- 5 years parts and labor on the evaporator.
- 5 years parts on the compressor and condenser.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- · Residential Applications: 1 year parts and labor

• 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •

• 1-800-SCOTSMAN • Fax: 847-913-9844 • www.scotsman-ice.com • customer.relations@scotsman-ice.com •

C0830 - 800lb Cube Ice Machine

Prodigy Plus[®] Modular Cube Ice Machine

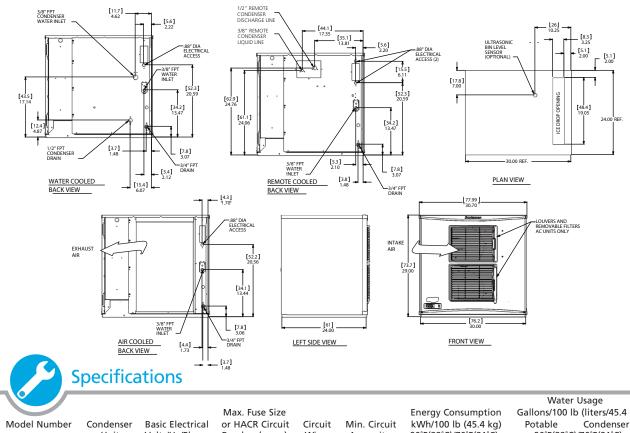

C	Model Number ube Size: medium or small	Condenser Unit	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Gallons/100 l Potable	b (liters/45.4 kg) Condenser C)/70°F(21°C)
	C0830MA-3	Air	208-230/60/3	15	3	8.4	4.99	18.0/68.2	-
me	C0830MA-32	Air	208-230/60/1	15	2	10.2	4.99	18.0/68.2	-
d.	C0830MR-32	Remote	208-230/60/1	15	2	10.0	4.70	18.4/69.8	-
	C0830MW-32	Water	208-230/60/1	15	2	9.0	4.00	18.9/71.7	136.0/515.7
sm	C0830SA-3	Air	208-230/60/3	15	3	8.4	4.99	18.0/68.2	-
	C0830SA-32	Air	208-230/60/1	15	2	10.2	4.99	18.0/68.2	-
.,	C0830SR-32	Remote	208-230/60/1	15	2	10.0	4.70	18.4/69.8	-
	C0830SW-32	Water	208-230/60/1	15	2	9.0	4.00	18.9/71.7	136.0/515.7

All Models							
Dimensions (W x D x H):							
Unit:	30" x 24" x 29" (76.2 x 61.0 x 73.7 cm)						
Shipping Carton:	33.5" x 27.5" x 34" (85.1 x 69.9 x 86.4 cm)						
Shipping Weight: 220 lb / 100 kg	BTUs per hour: 13,700						
Refrigerant: R-404	4A						



Accessories

Model Number	Description				
KVS	Vari-Smart™ Ice Level Control - Program ice bin levels to match ice needs.				
KSBU	Smart-Board [™] Advanced Control - Use additional operational data for fast diagnosis.				
KSBU-N	Smart-Board™ Advanced Control with Network - Network capable.				
ERC311-32	Remote condenser for C0830xR, 208-230/60/1 - Consult remote condenser spec sheet for details				
BRTE10	10ft (3.0 m) line set, brazing required				
BRTE25	25ft (7.6 m) line set, brazing required				
BRTE40	40ft (12.2 m) line set, brazing required				
BRTE75	75ft (22.9 m) line set, brazing required				
KPAS	Prodigy Advanced Sustainability Kit - Includes KVS and KSBU - N				
KPPSA329	Prodigy Plus [®] Side Air Flow Kit for C0830 and C1030				

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.

Ope	erating Requir	ements	
	Minimum	Maximum	
Air Temperatures Water Temperatures Remote Cond. Temps Water Pressures Electrical Voltage	50°F (10°C) 40°F (4.4°C) -20°F (-29°C) 20 PSIG (1.4 bar) -5%	100°F (38°C) 100°F (38°C) 120°F (49°C) 80 PSIG (5.5 bar) +10%	

Specifications and design are subject to change without notice.

• 101 Corporate Woods Parkway, Vernon Hills, IL 60061

1-800-SCOTSMAN Fax: 847-913-9844

• www.scotsman-ice.com customer.relations@scotsman-ice.com

© 2021 Scotsman Ice Systems.



