Prodigy

CU3030 - 300lb Self-Contained Ice Machine

Prodigy[®] Undercounter Cuber with Storage



CU3030

Scotsman[®]

Features and Benefits

- Prodigy [®] undercounter cubers use significantly less energy and water than other cube ice machines, exceeding Federal energy efficiency regulations.
- AutoAlert™ control panel can communicate operating status and signal when it's time to descale, sanitize and more- making upkeep easier.
- The patented WaterSense adaptive purge control delivers maximum reliability by reducing scale buildup for a longer time between cleanings.
- All external panel components are crafted for optimal aesthetic appeal through superior fit and finish.
- Preventative maintenance is simpler than ever with easily-removed door, top panel and storage bin allowing clear access to all internal components and a diagnostic code display insuring the right fix the first time.
- Includes ice scoop, 6" adjustable legs and 6' power cord.


		Air Cooled			Water Cooled		
		70°F/21°C 50°F/10°C	Air Water	90°F/32℃ 70°F/21℃	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C
		313/142 lb/ka		224/102	347/158 lb/ka		282/128
Cube Ice	Cert			lb/kg	ib/kg		lb/kg
Cube Ice Common ice form, ideal for mixed drinks	Cert	ification		ib/kg			Varrant
	E.S. E.V. E.Y. S.COTS MAN STANDARDS	ification	^{p.} RE	ID/Kg	• 3 years pa • 5 years pa	rts and lak	

ce Machine

• 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •

• 1-800-SCOTSMAN • Fax: 847-913-9844 • www.scotsman-ice.com • customer.relations@scotsman-ice.com •

Prodigy® Undercounter Cuber with Storage

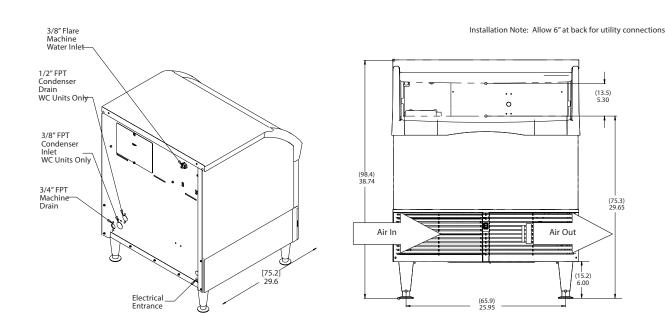

Specifications

Water Usage Max. Fuse Size Energy Consumption Gallons/100 lb (liters/4!					5				
Model Number* Cube Size: medium or small	Condenser Unit	Storage lb/kg	Basic Electrical Volts/Hz/Phase	or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C)/	Condenser
ECU3030MA-1	Air	110/50	115/60/1	15	2	Cord	7.35	18.0/68.2	-
₽CU3030MA-32	Air	110/50	208-230/60/1	15	2	Cord	7.35	18.0/68.2	-
∽ ┌─CU3030SA-1	Air	110/50	115/60/1	15	2	Cord	7.35	18.0/68.2	-
S CU30305A-32	Air	110/50	208-230/60/1	15	2	Cord	7.35	18.0/68.2	-
CU3030SW-1	Water	110/50	115/60/1	15	2	Cord	5.22	18.0/68.2	150/586

	All Models		
Dimensions (W >	(D x H):		
Unit:	30" x 30" x 33" (76.2 x 76.2 x 83.8 cm)		
Shipping Carton:	33" x 33" x 39.5" (83.8 x 83.8 x 100.3 cm)		
Shipping Weight:	230 lb / 104 kg		
BTUs per hour:	5,200		
Refrigerant: R-404A			

ႆ၂၀	Accessories

Model Number	Description
KLP8S	Kit 6 inch leg SS
KPUFM30	Kit Prodigy undercounter floor mount 30 inch for CU3030 (add .5" to height)

FRONT VIEW

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.

Ope	erating Requirements				
	Minimum	Maximum			
Air Temperatures	50°F (10°C)	100°F (38°C)			
Water Temperatures	40°F (4.4°C)	100°F (38°C)			
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)			
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)			
Electrical Voltage	-5%	+10%			

Specifications and design are subject to change without notice.



• 1-800-SCOTSMAN Fax: 847-913-9844

• www.scotsman-ice.com customer.relations@scotsman-ice.com © 2021 Scotsman Ice Systems.



