



Self Contained Undercounter Nugget with Storage

Features and Benefits

Reliability:

- Greaseless bearing for reduced maintenance.
- Stainless steel evaporator for maximum durability.
- 3 Year parts and labor warranty.
- Designed, engineered, assembled in the USA.

Ease of Use:

- External air filter for easy cleaning.
- Unit specific QR code for quick access to service manuals and warranty history.
- Slide back door allows easy access to ice in the bin.
- Intuitive control panel allows for quick and easy operation.
- Ice scoop and power cord included.

Compact Design:

- Only 24" wide, the ice maker can be placed in the tightest locations.
- Optional floor mount kit lowers height to 33.5".

High Production:

• Produces up to 340 lb (154 kg) per day and stores 80 lb (36 kg), meeting the ice demands for many different applications.

Environmentally Friendly:

- Meets new US federal energy efficiency requirements.
- Meets US Safe Drinking Act low lead requirements.
- Non-ozone depleting R-134A refrigerant.



Proven and reliable greaseless bearing will reduce maintenance.



Front accessible external air filter for easy cleaning.



24 Hour Volume Production

Ai	r Cooled	Water Cooled		
70°F/21°C	Air 90°F/32°C	70°F/21°C Air 90°F/32°C		
50°F/10°C	Water 70°F/21°C	50°F/10°C Water 70°F/21°C		
340/154	266/121	340/154 281/127		
lb/kg	lb/kg	lb/kg lb/kg		



Chewable, slow-melting ice. Ideal for use in healthcare, foodservice and school applications.



3/4" x 5/16" x 3/8" (1.9 x 0.8 x 0.95 cm)



Certification


















- 3 years parts and labor on all components.
- \bullet 5 years parts on the compressor.
- Warranty valid in North, South & Central America for commercial installations.
- \bullet Contact factory for warranty in other regions.
- · Residential Applications: 1 year parts and labor



UN324 - 300lb Nugget Ice Machine

Self Contained Undercounter Nugget with Storage

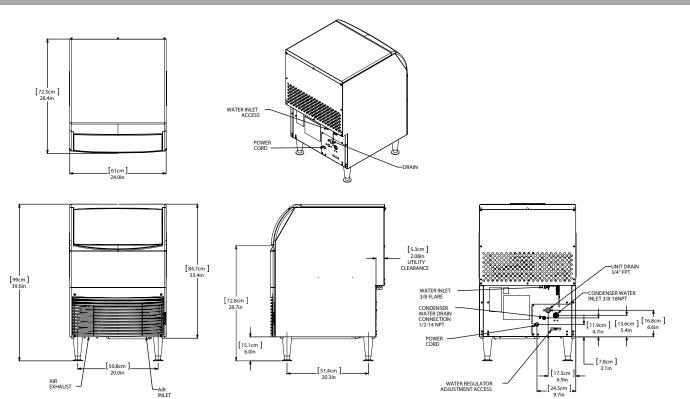



Model Number	Condenser Unit	Storage Capacity Ib/kg	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Gallons/100 ll Potable	b (liters/45.4 kg) Condenser)/70°F(21°C)
UN324A-1	Air	80/36	115/60/1	15	Cord	5.47	12.0/45.5	-
UN324W-1	Water	80/36	115/60/1	15	Cord	4.55	12.0/45.5	95



All Models

Dimensions (W x D x H):

24" x 28.5" x 39" Unit:

(61.0 x 72.4 x 99.1 cm)

Includes 6" (15.24 cm) adjustable legs

28.75" x 38.65" x 39" Shipping Carton:

(73.0 x 98.2 x 99.1 cm)

Shipping Weight: 210lb / 95kg

BTUs per hour: 3,000

Refrigerant: R-134A



Accessories

Model Number	Description
KLP8S	Kit, Leg 6", Stainless Steel
KBC1 KUFM24	Kit, Casters Floor mount kit. Lowers height to 33.5"
KUFIVIZ4	Floor mount kit. Lowers height to 33.5



Operating Requirements

	Minimum	Maximum	
Air Temperatures	50°F (10°C)	100°F (38°C)	
Water Temperatures	40°F (4.4°C)	100°F (38°C)	
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)	
Electrical Voltage	-5%	+10%	

Specifications and design are subject to change without notice.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter

• 101 Corporate Woods Parkway, Vernon Hills, IL 60061

• 1-800-SCOTSMAN Fax: 847-913-9844

www.scotsman-ice.com customer.relations@scotsman-ice.com

© 2021 Scotsman Ice Systems.





Mater Head