

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

Back Bar

*Underbar Equipment
 Super Deluxe Series*

Model : TBB-1SB-N6



FEATURES & BENEFITS

■ Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

■ Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

■ Stainless steel countertop and interior

The exterior of the cabinet is constructed with heavy gauge reinforced stainless steel countertop and wear-resistant black vinyl coated galvanized steel. The interior is painted galvanized steel with reinforced stainless steel floor. Turbo Air Back Bar model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

■ LED interior lighting

■ Adjustable, heavy duty, PE (polyethylene) coated wire shelves

■ Refrigerator holds 33°F ~ 38°F for the best in beverage preservation

NATURAL
 Refrigerant

SPEC
 ISO 9001:2008

ETL
 Intertek


ETL
 Intertek

3 YEAR
 WARRANTY

Compressor
7 YEAR
 WARRANTY
 (U.S.A. only)

Model	Swing Door	CU./FT.	1/2 Barrels	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D x H† (inches)
TBB-1SB-N6	1	7.76	1	2	1/8	1.3	235	235/8 x 321/8 x 373/4

Model : TBB-1SB-N6

ELECTRICAL DATA		
Voltage		115/60/1
Plug Type		NEMA 5-15P
Full Load Amperes		1.3
Compressor HP		1/8
Refrigerant		R-600a
Cord Length (ft.)		8.5
Lamp (W)		6.5
DIMENSIONAL DATA		
Capacity	1/2 Barrels	1
	Cubic Feet	7.76
Ext. Length Overall (in.)		23 ⁵ / ₈ (599mm)
Ext. Depth Overall (in.)*		32 ¹ / ₈ (816mm)
Ext. Height Overall (in.)†		37 ³ / ₄ (875mm)
Net Weight (lbs.)		190
Gross Weight (lbs.)		235
# of Swing Door		1
# of Shelves		2
Shelf size (L x D) (in.)		18 ¹ / ₂ x 19 ¹ / ₂
# of Casters		 4EA

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2" for rear spacers.

† Height does not include 5" for caster height.

■ **WARRANTY :** 3 Year Parts and Labor Warranty
Additional 4 Year Warranty on Compressor

■ STANDARD FEATURES


- Anti-corrosion coated evaporator
- Self-contained system
- 4" dia. swivel casters standard
- Door locks standard

■ OPTIONAL ACCESSORIES :


- ☐ Additional PE coated wire shelf: P0178D0100
- ☐ 6" adjustable stainless steel leg: P0121P0100

PLAN VIEW


(unit : inch)



TOP VIEW

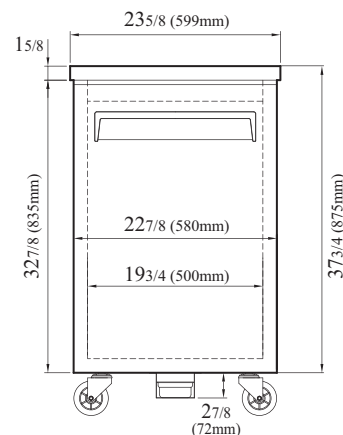

FRONT VIEW

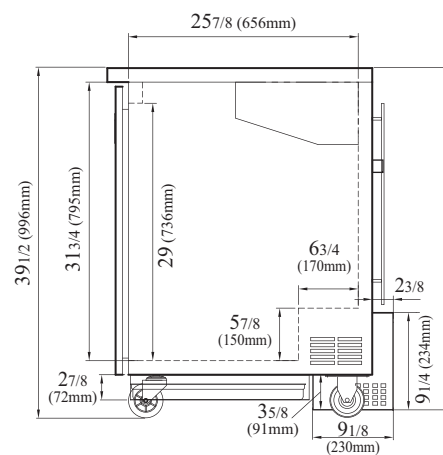

SIDE VIEW

Ver.20200706

NATURAL
Refrigerant

SPEC
ISO 9001:2008

ETL
Intertek

ETL
Intertek

3 YEAR
WARRANTY

Compressor
7 YEAR
WARRANTY
(10.5 A amp)

■ Turbo Air : 800-627-0032 ■ GK : 800-500-3519
■ Warranty : 800-381-7770 ■ AC : 888-900-1002

Turbo air
REFRIGERATION MANUFACTURER

GERMAN KNIFE

RADIANCE

Turbo air
REFRIGERATION SYSTEM

Texaking