

O V E N S**VULCAN****VC44E SERIES
DOUBLE DECK ELECTRIC CONVECTION OVENS**

Model VC44ED
Shown with optional casters

**SPECIFICATIONS**

Double section, electric convection oven, Vulcan Model No. (VC44ED) (VC44EC). Stainless steel front, sides, top and legs. Independently operated stainless steel doors with double pane windows. Non-sag insulation applied to the top, rear, sides, bottom and doors. Porcelain enamel on steel oven interiors measure 29"w x 22 $\frac{1}{8}$ "d x 20"h. Two interior oven lights per section. Five nickel plated oven racks per section measure 28 $\frac{1}{4}$ " x 20 $\frac{1}{2}$ ". Eleven position nickel plated rack guides with positive rack stops per section. Each section heated by electric solid sheath elements rated at 12 KW. Furnished with a two speed $\frac{1}{2}$ H.P. oven blower-motor per section. Oven cool switch for rapid cool down. 208 or 240 volt, 60 Hz, 1 or 3 phase.

Exterior Dimensions:

40 $\frac{1}{4}$ "w x 41 $\frac{1}{8}$ "d (includes motor & door handles) 37 $\frac{3}{4}$ "d (includes motor only) x 70"h on 8" legs.

NSF listed. UL listed. UL listed to Canadian safety standards.

- ☐ **VC44ED** Solid state temperature controls adjust from 150° to 500°F. 60 minute timer with audible alarm.
- ☐ **VC44EC** Computer controls with digital time and temperature readouts. 99-hour timer with audible alarm. Roast and Hold cycle. One hundred programmable menu selections. Shelf I.D. programming.

STANDARD FEATURES

- Stainless steel front, sides, top and legs.
- Independently operated stainless steel doors with double pane windows.
- 25 total KW.
- $\frac{1}{2}$ H.P. two speed oven blower-motor.
- Moisture vent.
- Oven cool switch for rapid cool down.
- Porcelain enamel on steel oven interiors.
- Five nickel plated oven racks with eleven rack positions per section.
- One year limited parts and labor warranty.

OPTIONS

- ☐ Complete prison package.
 - ☐ Security screws only.
- ☐ Casters.
- ☐ Simultaneous chain driven doors.
- ☐ 480V/60 Hz/1 or 3 phase.
- ☐ Second year extended limited parts and labor warranty.

ACCESSORIES

- ☐ Stainless steel rear motor enclosure.
- ☐ Extra oven rack(s).
- ☐ Rack hanger(s).
- ☐ Stainless steel drip pan.
- ☐ Down draft flue diverter for direct vent connection.

VULCAN

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602



VC44E SERIES



DOUBLE DECK ELECTRIC CONVECTION OVENS

OPTIONAL VOLTAGES

- ☐ 480 volt, 60 Hz, 3 phase.
- ☐ 220/380 volt, 50 Hz, 1 phase, 3 wire.
- ☐ 220/380 volt, 50 Hz, 3 phase, 4 wire.
- ☐ 240/415 volt, 50 Hz, 3 phase, 4 wire.

CLEARANCES

	Combustible	Non-Combustible
Rear	2"	2"
Right Side	4"	4"
Left Side	1"	1"

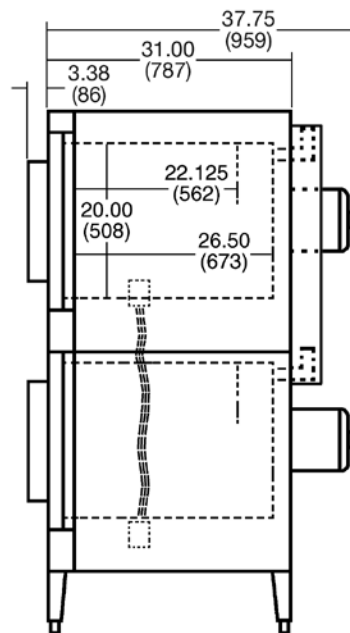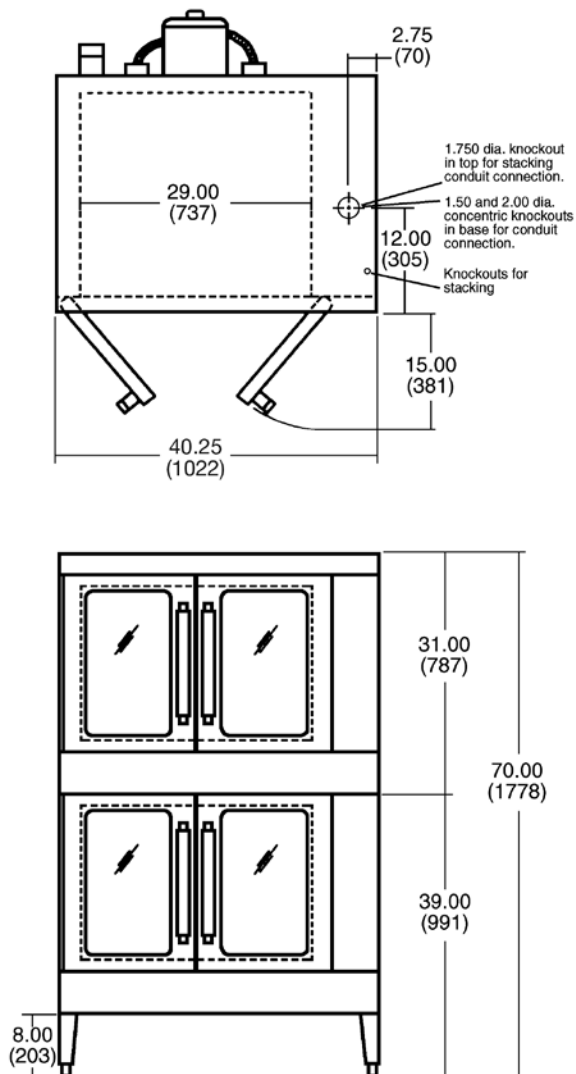

MODEL NO.	TOTAL CONN. KW	3 PHASE LOAD KW PER PHASE			NOMINAL AMPS PER LINE WIRE									1 PHASE		WEIGHT			
					3 PHASE											WITH SKIDS & PACKAGING		WITHOUT SKIDS & PACKAGING	
					208 VOLT			240 VOLT			480 VOLT								
		X-Y	Y-Z	X-Z	X	Y	Z	X	Y	Z	X	Y	Z	208V	240V	LBS.	KG	LBS.	KG
VC44E	25	8	8	9	70	66	70	66	58	66	28	30	30	120	104	880	400	778	352



a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

NOTE: In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.