

lamber® **P700EKDPS**



Designed for high-volume commercial kitchens, the P700EKDPS delivers exceptional washing performance for pots, pans, trays and utensils. Featuring a large-capacity wash chamber, durable stainless steel construction and intuitive electronic controls, it provides reliable results after each cycle.

FEATURES

- 3 washing cycles to accommodate varying soil levels and workload of high-volume operations.
- Built-in drain pump enables flexible installations where direct gravity drainage is not available.
- Rinse-aid dispenser ensures sparkling, spot-free results while enhancing drying efficiency.
- Stainless steel upper and lower wash and rinse arms for thorough cleaning performance.



PARTS AND
LABOR



SPECIFICATIONS

Power: 208 V - 10.500 W - 29 A

Clearance: 33.7 (85 cm)

Rack dimensions:
25.2" x 26.4" (64 cm x 67 cm)

Work height: 34" (86 cm)

Tank capacity: 16 gal (61 L)

Wash cycle duration: 2 - 3 - 4 min.

Wash cycle capacity: 30/20/15 baskets/h

Water consumption: 0.7 gal (3 L) per cycle

Electric pump: 1500 W

Wash tank element: 9000 W

Rinse tank element: 9000 W

Boiler capacity: 2 gal (8 L)

Water inlet temperature:
131 ÷ 140 °F (55 ÷ 60 °C)

Water inlet connection: 3/4" G

Water outlet connection 32 mm / 3/4"

Inlet water pressure: 40 ÷ 80 psi

Water hardness: 5 - 10 °F (-15 ÷ -12 °C)

Rinse temperature:
175 ÷ 194 °F (82 ÷ 90 °C)

Noise level: < 70 dB (A)

Dimensions:
Length: 35.8" (90 cm)
Width: 31.6" (80 cm)
Height: 80.5" (204 cm)

Connection: 
(3 PH - 208 V)


Net weight: 353 lb (160 kg)

Included accessories


- 1 stainless steel basket
- 1 stainless steel baking pan insert



LEFT VIEW

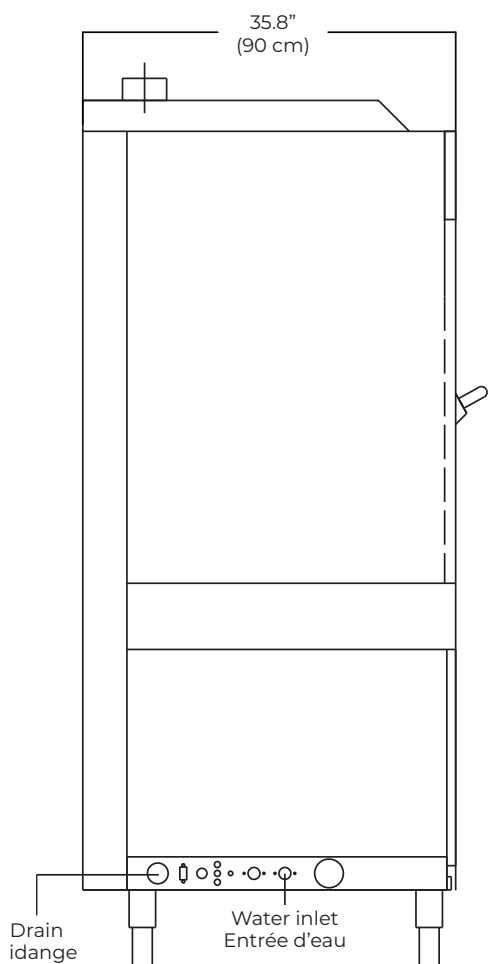

TOP VIEW

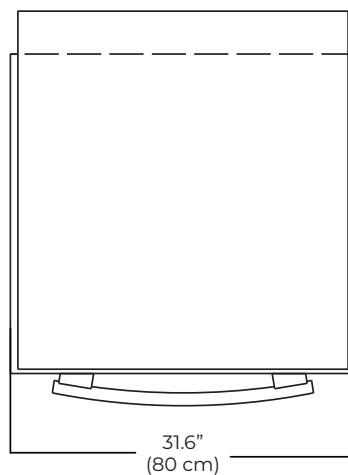

FRONTAL VIEW

