Atosa Smart Touch Combi Ovens

STANDARD FEATURES

- 10” Smart Touch Flat Screen - Large colorful and vibrant icons
- Combi Smart Cooking - Automated monitoring to maintain cooking temperature and humidity
- Combi Smart Touch - Programmable multi-stage cooking and menu options
- 8 Fan Speeds with balance reverse
- Humidity Control – Automatically maximizes steam saturation and humidity control
- Sub-divided Heating System for maximum recovery
- Smart Touch Rack Timing for batch cooking and a la carte service
- USB Storage – Save and share recipes and unit data with multiple units and locations
- Wi-Fi Connection - Remotely monitor Combi operation in real time via tablet or smart phone
- Wi-Fi Self Diagnostics – Protect and ensure oven remains in safe working order
- Wi-Fi Service Diagnostics - Remote service tech diagnostics and trouble shooting
- 6 Mode Automated Combi Wash – Automatic cleaning based on soil and usage
- ATOSA Chemicals – Approved for use with ATOSA’s proprietary liquid Combi cleaner and rinse agent
- Twin Chemical Fill Tanks – Combi automatically reminds user to add cleaner / rinse to tanks when low
- Sleek Design - Triple pane tempered glass doors, condensed footprint, convenient for cleaning and maintenance
- Footless Combi Design - Ergonomic footing for stability and placement
- High-Pressure Coil Wash Hose - Ideal for manual quick flush, rinsing and cabinet quick cleaning

Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

MODELS

AEC-0511E / AEC-0621E / AEC-0711E / AEC-1011E / AEC-1021E



AEC-0511E



AEC-1011E



AEC-0621E



AEC-1021E



AEC-0711E

Electrical Installation Requirements

The electrical cord and plug are not supplied with the combi oven. Electrical requirements and wire specifications are provided on the equipment specification sheet for reference by a qualified, licensed electrician. All electrical connections and installations must be performed in accordance with all applicable national, state, and local electrical codes, regulations, and requirements.

1 YEAR PARTS AND LABOR WARRANTY


Atosa is continuously improving products. Specifications are subject to change
REV. 10/26

Atosa Smart Touch Combi Ovens


SPECIFICATIONS

MODELS	AEC-0511E	AEC-0711E	AEC-1011E	AEC-0621E	AEC-1021E
Capacity	5 x (18” x 13”) Pan or 5 x (12” x 20”) Pan	7 x (18” x 13”) Pan or 7 x (12” x 20”) Pan	10 x (18” x 13”) Pan or 10 x (12” x 20”) Pan	6 x (18” x 26”) Pan or 12 x (12” x 20”) Pan	10 x (18” x 26”) Pan or 20 x (12” x 20”) Pan
Rack Slots	5	7	10	6	10
Volts	208/240	208/240	208/240	208/240	208/240
Phase	3	3	3	3	3
Amp Draw (Min/Max)	21/24	33/38	39/46	39/46	62/70
Breaker (A)	30/30	40/50	50/60	50/60	80/90
KW	7.4 - 9.9	11.6-15.2	14.5-19	14.5-19	22.5-28.8
Power Cord Specification	SJTOW 4 X 10 AWG FT-1 VW-1	SJTOW 4 X 8 AWG FT-1 VW-1	SJTOW 4 X 6 AWG FT-1 VW-1	SJTOW 4 X 6 AWG FT-1 VW-1	SJTOW 4 X 4 AWG FT-1 VW-1
Dimension (WxDxH)	31” x 34 1/2” x 28”	31” x 34 1/2” x 35”	31” x 34 1/2” x 41 1/2”	36” x 42 1/2” x 36 1/2”	36” x 42 1/2” x 48 1/2”
Weight (lb)	209	267	300	354	436
Weight Capacity	Total = 198 lb 39 lb Per Shelf	Total = 273 lb 39 lb per Shelf	Total = 390 lb 39 lb per Shelf	Total = 390 lb 65 lb Per Shelf	Total = 650 lb 65 lb Per Shelf
Water Inlet Size	5/16” OD Push-to-Connect	5/16” OD Push-to-Connect	5/16” OD Push-to-Connect	5/16” OD Push-to-Connect	5/16” OD Push-to-Connect
Water Pressure (PSI)	30-90	30-90	30-90	30-90	30-90
Drain Size (ID/OD)	1” ID / 1-1/2” OD	1” ID / 1-1/2” OD	1” ID / 1-1/2” OD	1” ID / 1-1/2” OD	1” ID / 1-1/2” OD
Energy Star Rating		ENERGY STAR	ENERGY STAR	ENERGY STAR	ENERGY STAR


PLAN VIEW




AEC-0511E

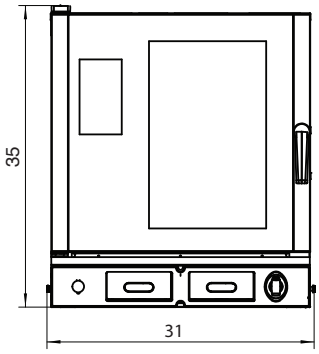


AEC-0711E

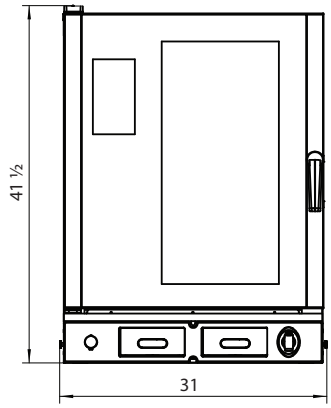

AEC-1011E

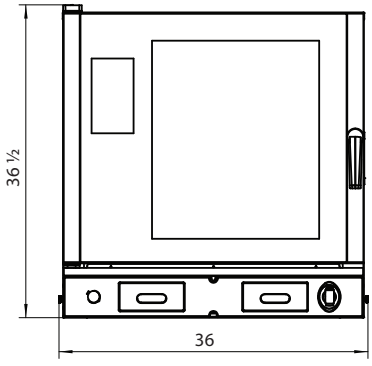

AEC-0621E

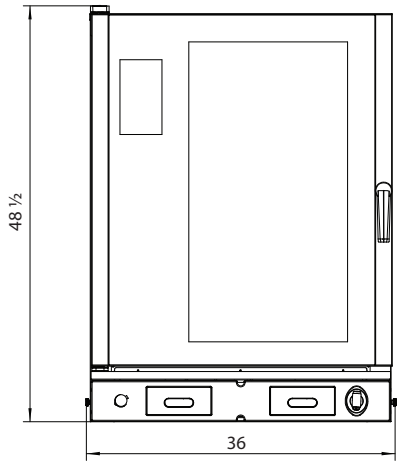

AEC-1021E

Atosa is continuously improving products. Specifications are subject to change
REV. 10/26