ATOSA USA, INC.
Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

"WE MAKE THE KITCHEN BETTER!"

MODELS:
MBF8020GR

Dual-Temp Refrigerator & Freezer



Standard Features

- Stainless steel exterior & interior
- Refrigerator on top / freezer on bottom
- Electronic Temperature Controller
- Refrigerator maintains temperatures between 35°F – 38°F
- Freezer maintains temperatures between -8°F – 0°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Two (2) shelves standard per section
- Down duct refrigeration to ensure even distribution of air

For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F, freezer between -8°F to 0°F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

3 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY

REV. 08/26


ATOSA USA, INC.
Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

"WE MAKE THE KITCHEN BETTER!"

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBF8020GR	2	21.4	2	4	4.4	115/60/1	Top: 1/7 Bottom: 1/2	R290	$28^{3/4}\times33^{3/4}\times81^{1/4}$	255	332

PLAN VIEW

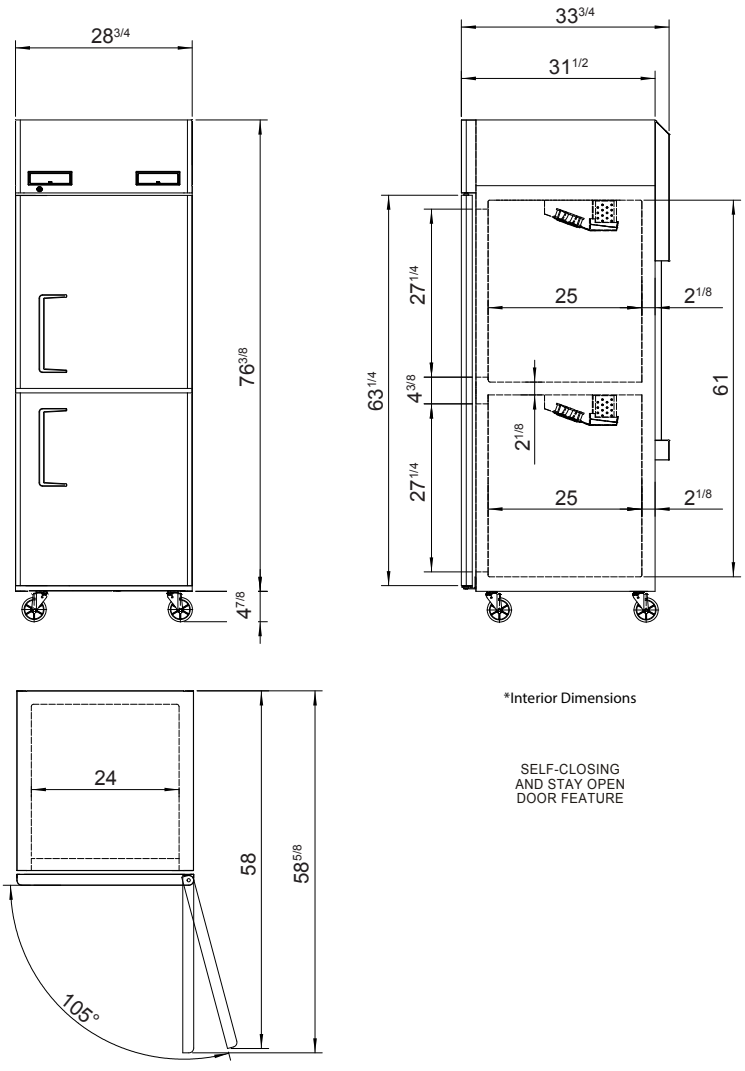

*Interior Dimensions

SELF-CLOSING
AND STAY OPEN
DOOR FEATURE

Casters | Epoxy shelves | Door lock | Down duct | Temperature control



