

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Droi	inat	
Pro	IECL	

Model #: Item # :

Qty :

Available W/H :

Approval :

Swing Door Merchandisers



Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

- · Keep food products safe by maintaining constant temperatures.
- · Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- · Early Warning Alarm program detects issues before malfunction occurs.
- · Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- · Rapid cool-down function (Turbo cooling).
- · Automatic evaporator fan motor delays.

Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet the new standards of the EPA and DOE in 2017. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Energy conserving fan control

Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

Double pane glass doors with Low-E glass

Energy saving double pane glass doors are equipped with Lowemissivity glass, which reduces outer heat gain and decreases energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduces door maintenance and bushing wear, which in turn facilitates smoother door opening.

High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.


- LED lighting interior
- Refrigerator holds 33°F ~ 38°F for the best in food preservation



TGM-12SDW-N6



TGM-12SDB-N6





Refrigerant Stranger Lineterk Stranger Lineterk							
Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	$L \ge D^* \ge H^+$ (inches)
TGM-12SD-N6	1	10.19	3	1/5	1.9	257	253/4 x 231/4 x 63

Glass Door Merchandisers Super Deluxe Series

Model : TGM-12SD-N6

Swing Door Merchandisers

Model: TGM-12SD-N6

ELECTRICAL DATA					
Voltage	115/60/1				
Plug Type	(i) NEMA 5-15P				
Full Load Amperes	1.9				
Compressor HP	1/5				
Cord Length (ft.)	7				
Refrigerant	R-600a				
DIMENSIONAL DATA					
# of Doors	1				
Net Capacity (cu. ft.)	10.19				
Ext. Length Overall (in.)	253/4 (655mm)				
Ext. Depth Overall (in.)*	231/4 (590mm)				
Ext. Height Overall (in.) ⁺	63 (1600mm)				
Int. Length Overall (in.)	211/2 (545mm)				
Int. Depth Overall (in.)	183/4 (475mm)				
Int. Height Overall (in.)	487/8 (1240mm)				
Net Weight (lbs.)	235				
Gross Weight (lbs.)	257				
# of Shelves	3				
Shelf Size (L x D) (in.)	20 x 151/2				

Design and specifications subject to change without notice. Actual shipping weight may differ due to extra packing materials for product protection. * Depth does not include 2-1/4" for door handle.


+ Height does not include 1-5/8" for leg height.

WARRANTY: ³ Year Parts and Labor Warranty Additional 2 Year Warranty on Compressor

- Anti-corrosion coated evaporator
- Door locks standard
- Adjustable PE (polyethylene) coated wire shelves
- Price tag channel available (optional)
- 2.5" dia. casters available (optional)
- Two color options available (standard): white cabinet (W), black cabinet with black color trim (B).

OPTIONAL ACCESSORIES :

- 2.5" caster, 1/2" diameter & 13 TPI: 30265H0100 (non-brake), 30265H0200 (w/ brake)
- Additional PE coated wire shelf: P0178A0600
- Price tag channel: P0122K5900 (19-1/4"L)

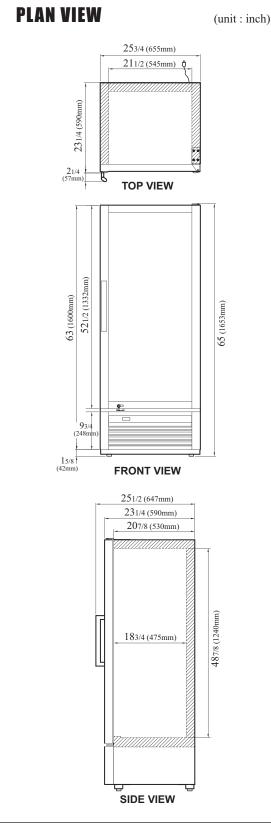

Ver.20171127



Turbo Air : 800-627-0032 **GK** : 800-500-3519

■ Warranty : 800-381-7770 ■ AC : 888-900-1002





ENERGY STAR®

Qualified



